



ENERG Y IJA
 енергия · ενέργεια IE IA

STIEBEL ELTRON WPW 13 basic Set



55 °C

35 °C



A+

A++

48 dB

■ 13	■ 15
■ 9	■ 10
■ 5	■ 5
kW	kW

2015

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPW 13 basic Set
		230917
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Rated heating output in moderate climates for medium temperature applications	kW	9
Rated heating output in moderate climates for low temperature applications	kW	10
Energy efficiency for central heating in moderate climates for medium temperature applications	%	114
Energy efficiency for central heating in moderate climates for low temperature applications	%	190
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	5802
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	4067
Sound power level internal	dB(A)	48
Rated heating output in colder climates for medium temperature applications	kW	13
Rated heating output in colder climates for low temperature applications	kW	15
Rated heating output in warmer climates for medium temperature applications	kW	5
Rated heating output in warmer climates for low temperature applications	kW	5
Energy efficiency for central heating in colder climates for medium temperature applications	%	120
Energy efficiency for central heating in colder climates for low temperature applications	%	191
Energy efficiency for central heating in warmer climates for medium temperature applications	%	107
Energy efficiency for central heating in warmer climates for low temperature applications	%	178
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	10236
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	7205
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	2210
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	1559



ENERG

енергия · ενεργεια

Y

IJA

IE

IA


STIEBEL ELTRON

WPW 13 basic Set





+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>

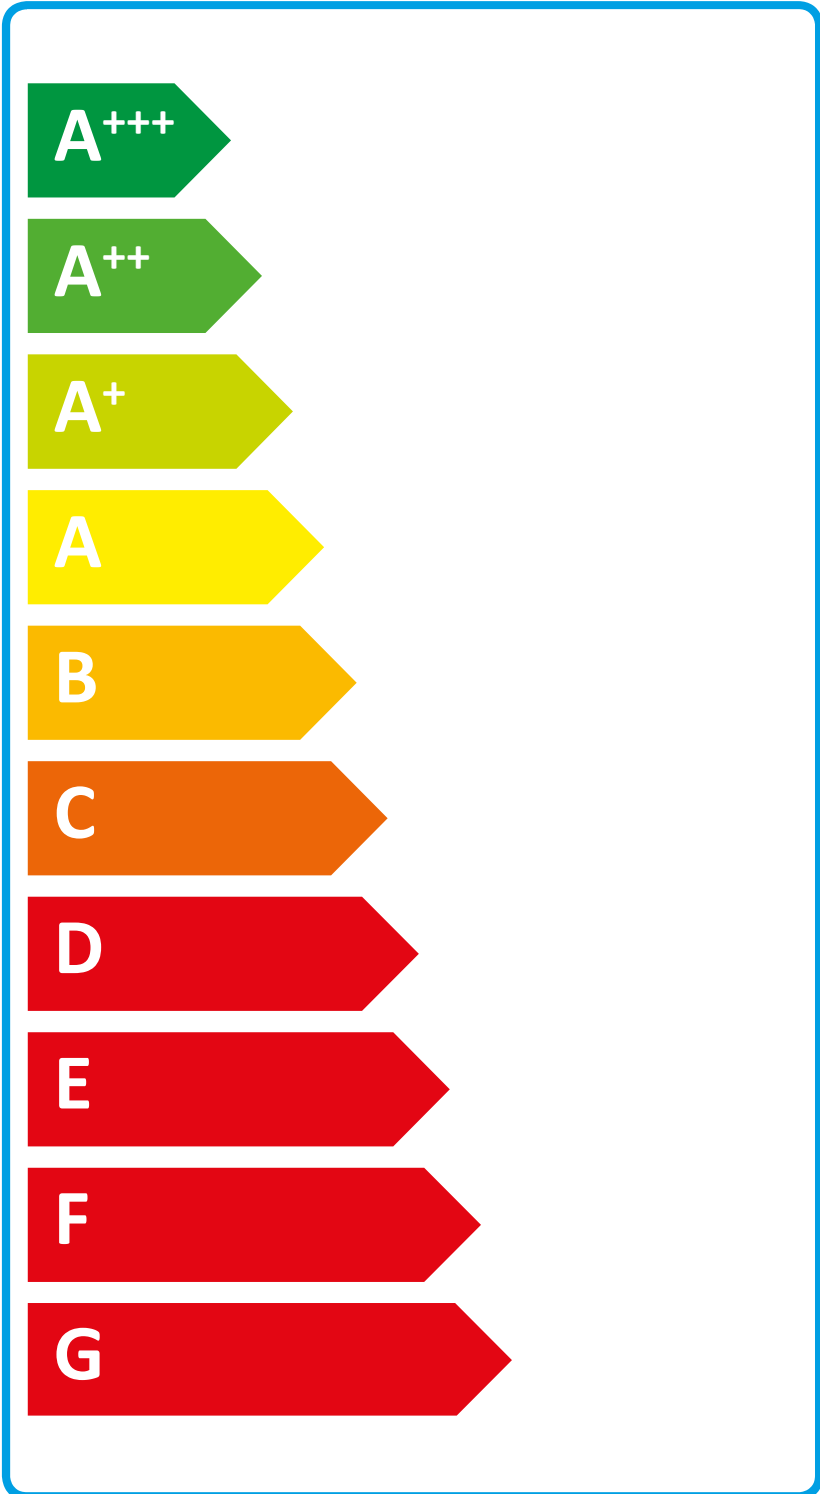

Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

			WPW 13 basic Set
			230917
Manufacturer			STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications		%	114
Temperature controller class			VII
Contribution of temperature controller to room heating energy efficiency		%	3,5
Room heating energy efficiency of composite system under moderate climatic conditions		%	193
Room heating energy efficiency of composite system under colder climatic conditions		%	191
Room heating energy efficiency of composite system under warmer climatic conditions		%	178
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions		%	3
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions		%	15
Energy efficiency class for central heating in moderate climates for medium temperature applications			A+



ENERG Y IJA
 енергия · ενέργεια IE IA

STIEBEL ELTRON WPF 10 basic



55 °C

35 °C



A+

A++

51 dB

■ 11	■ 12
■ 9	■ 10
■ 9	■ 10
kW	kW

2015

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPF 10 basic
		230946
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Rated heating output in moderate climates for medium temperature applications	kW	9
Rated heating output in moderate climates for low temperature applications	kW	10
Energy efficiency for central heating in moderate climates for medium temperature applications	%	114
Energy efficiency for central heating in moderate climates for low temperature applications	%	190
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	5788
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	4053
Sound power level internal	dB(A)	51
Rated heating output in colder climates for medium temperature applications	kW	11
Rated heating output in colder climates for low temperature applications	kW	12
Rated heating output in warmer climates for medium temperature applications	kW	9
Rated heating output in warmer climates for low temperature applications	kW	10
Energy efficiency for central heating in colder climates for medium temperature applications	%	120
Energy efficiency for central heating in colder climates for low temperature applications	%	199
Energy efficiency for central heating in warmer climates for medium temperature applications	%	114
Energy efficiency for central heating in warmer climates for low temperature applications	%	190
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	8385
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	5768
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	3751
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	2617



ENERG

енергия · ενεργεια

Y



IJA

IE

IA

STIEBEL ELTRON

WPF 10 basic



A⁺

A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G

A⁺

Boiler icon with A⁺ label

+ Solar panel icon
 + Water tank icon
 + Control panel icon
 + Boiler icon

Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

		WPF 10 basic
		230946
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	114
Temperature controller class		VII
Contribution of temperature controller to room heating energy efficiency	%	3,5
Room heating energy efficiency of composite system under moderate climatic conditions	%	118
Room heating energy efficiency of composite system under colder climatic conditions	%	124
Room heating energy efficiency of composite system under warmer climatic conditions	%	118
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	6
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	0
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Room heating energy efficiency class of composite system under moderate climatic conditions		A+

Product datasheet: Temperature controller to regulation (EU) no. 811/2013

		WPF 10 basic
		230946
Manufacturer		STIEBEL ELTRON
Heat source		Brine
{Niedertemperatur-Wärmepumpe}		-
With booster heater		x
Combi boiler with heat pump		-
Rated heating output in moderate climates for medium temperature applications	kW	9
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	9,7
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	9,8
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	10,0
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	10,1
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	9,7
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	9,7
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	9,7
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		4,44
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		4,85
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		5,28
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		5,78
Tj = dual mode temperature under moderate climatic conditions (COPd)		4,37
Tj = operating temperature limit under moderate climatic conditions (COPd)		4,37
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		4,37
Dual mode temperature (Tbiv)	°C	-10
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	0
Power consumption, thermostat OFF state (PTO)	W	78
Standby power consumption (PSB)	W	3
Power consumption, operating state, with crankcase heating (PCK)	W	0
Booster heater heating output (PSUB)	kW	0,00
Type of energy supply, booster heater		electric
Power control		Fixed
Sound power level internal	dB(A)	51
Flow rate, heat source side	m ³ /h	2,2