



ENERG
енергия · ενέργεια

Y IJA
IE IA

STIEBEL ELTRON WPL 25 AC compact set




55 °C

35 °C



54 dB

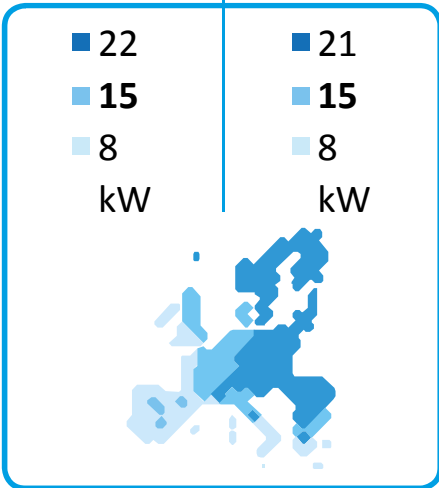

2019

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPL 25 AC compact set
		239082
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Energy efficiency class for central heating in moderate climates for low temperature applications		A+++
Rated heating output in moderate climates for medium temperature applications	kW	15
Rated heating output in moderate climates for low temperature applications	kW	15
Energy efficiency for central heating in moderate climates for medium temperature applications	%	144
Energy efficiency for central heating in moderate climates for low temperature applications	%	187
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	8444
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	6513
Rated heating output in colder climates for medium temperature applications	kW	22
Rated heating output in colder climates for low temperature applications	kW	21
Rated heating output in warmer climates for medium temperature applications	kW	8
Rated heating output in warmer climates for low temperature applications	kW	8
Energy efficiency for central heating in colder climates for medium temperature applications	%	131
Energy efficiency for central heating in colder climates for low temperature applications	%	160
Energy efficiency for central heating in warmer climates for medium temperature applications	%	177
Energy efficiency for central heating in warmer climates for low temperature applications	%	246
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	16179
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	12690
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	2369
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	1718
Sound power level external	dB(A)	54



ENERG

енергия · ενεργεια



STIEBEL ELTRON

WPL 25 AC compact set





+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>




		WPL 25 AC compact set
		239082
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	144
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	148
Room heating energy efficiency of composite system under colder climatic conditions	%	137
Room heating energy efficiency of composite system under warmer climatic conditions	%	183
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	11
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	35
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++

		WPL 25 AC compact set
		239082
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		-
Rated heating output in moderate climates for medium temperature applications	kW	15
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	13,8
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	8,4
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	7,8
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	9,0
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	12,5
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	13,4
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	13,4
Dual mode temperature (Tbiv)	°C	-5
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,48
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		3,51
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,61
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		6,66
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,59
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,28
For air/water heat pumps:Tj= -15 °C (if TOL< -20 °C) (COPd)		2,28
Operating temperature limit (Tol)	°C	-10
Heating water operating temperature limit (WTOL)	°C	65
Power consumption, OFF state (Poff)	W	10
Power consumption, thermostat OFF state (PTO)	W	10
Standby power consumption (PSB)	W	10
Power consumption, operating state, with crankcase heating (PCK)	W	38
Booster heater heating output (PSUB)	kW	0
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	54
Flow rate, heat source side	m ³ /h	4000



ENERG
енергия · ενέργεια


Y IJA
IE IA

STIEBEL ELTRON WPL 25 AC




55 °C

35 °C



54 dB

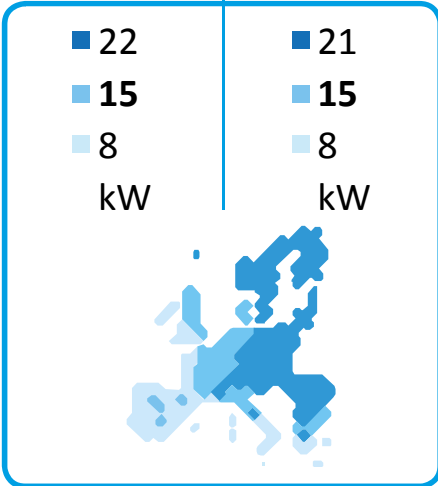

2019

811/2013


Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPL 25 AC
		236645
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Energy efficiency class for central heating in moderate climates for low temperature applications		A+++
Rated heating output in moderate climates for medium temperature applications	kW	15
Rated heating output in moderate climates for low temperature applications	kW	15
Energy efficiency for central heating in moderate climates for medium temperature applications	%	144
Energy efficiency for central heating in moderate climates for low temperature applications	%	187
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	8444
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	6513
Rated heating output in colder climates for medium temperature applications	kW	22
Rated heating output in colder climates for low temperature applications	kW	21
Rated heating output in warmer climates for medium temperature applications	kW	8
Rated heating output in warmer climates for low temperature applications	kW	8
Energy efficiency for central heating in colder climates for medium temperature applications	%	131
Energy efficiency for central heating in colder climates for low temperature applications	%	160
Energy efficiency for central heating in warmer climates for medium temperature applications	%	177
Energy efficiency for central heating in warmer climates for low temperature applications	%	246
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	16179
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	12690
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	2369
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	1718
Sound power level external	dB(A)	54






ENERG





енергия · ενεργεια




STIEBEL ELTRON

WPL 25 AC

+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>

		WPL 25 AC
		236645
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	144
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	148
Room heating energy efficiency of composite system under colder climatic conditions	%	135
Room heating energy efficiency of composite system under warmer climatic conditions	%	181
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	11
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	35
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++

		WPL 25 AC
		236645
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		-
Rated heating output in moderate climates for medium temperature applications	kW	15
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	13,8
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	8,4
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	7,8
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	9
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	12,5
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	13,4
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	13,4
Dual mode temperature (Tbiv)	°C	-5
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,48
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		3,51
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,61
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		6,66
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,59
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,28
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		2,28
Heating water operating temperature limit (WTOL)	°C	65
Power consumption, OFF state (Poff)	W	10
Power consumption, thermostat OFF state (PTO)	W	10
Standby power consumption (PSB)	W	10
Power consumption, operating state, with crankcase heating (PCK)	W	38
Booster heater heating output (PSUB)	kW	0
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	54
Flow rate, heat source side	m ³ /h	4000