




ENERG Y IJA
 енергия · ενέργεια IE IA



STIEBEL ELTRON

WPL 09 ICS classic
 compact plus set



55 °C

35 °C

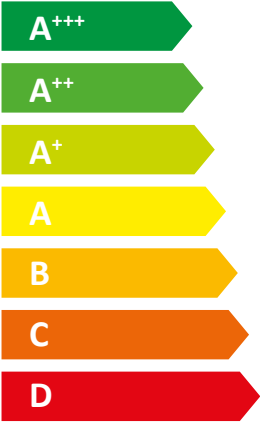

45 dB

32 dB

■ 7	■ 7
■ 4	■ 5
■ 2	■ 3

kW kW

A map of Europe with shaded regions in various shades of blue, corresponding to the kW consumption levels in the legend above.

2019

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPL 09 ICS classic compact plus set
		236728
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Energy efficiency class for central heating in moderate climates for low temperature applications		A+++
Rated heating output in moderate climates for average temperature applications (Prated)	kW	4
Rated heating output in moderate climates for low temperature applications (Prated)	kW	5
Seasonal room heating efficiency in moderate climates for average temperature applications (η_s)	%	130
Seasonal room heating efficiency in moderate climates for low temperature applications (η_s)	%	178
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2804
Annual energy consumption in moderate climates for low temperature applications (QHE)	kWh/a	2187
Sound power level internal	dB(A)	45
Sound power level external	dB(A)	32
Rated heating output in colder climates for average temperature applications (Prated)	kW	7
Rated heating output in colder climates for low temperature applications (Prated)	kW	7
Rated heating output in warmer climates for average temperature applications (Prated)	kW	2
Rated heating output in warmer climates for low temperature applications (Prated)	kW	3
Seasonal room heating efficiency in colder climates for average temperature applications (η_s)	%	119
Seasonal room heating efficiency in colder climates for low temperature applications (η_s)	%	154
Seasonal room heating efficiency in warmer climates for average temperature applications (η_s)	%	136
Seasonal room heating efficiency in warmer climates for low temperature applications (η_s)	%	198
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	5515
Annual energy consumption in colder climates for low temperature applications (QHE)	kWh/a	4321
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	921
Annual energy consumption in warmer climates for low temperature applications (QHE)	kWh/a	701



ENERG

енергия · ενεργεια

Y




IJA





IE



IA

STIEBEL ELTRON

WPL 09 ICS classic compact plus set

+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>

Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

		WPL 09 ICS classic compact plus set
		236728
Manufacturer		STIEBEL ELTRON
Seasonal room heating efficiency in moderate climates for average temperature applications (η_s)	%	130
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	134
Room heating energy efficiency of composite system under colder climatic conditions	%	123
Room heating energy efficiency of composite system under warmer climatic conditions	%	140
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	11
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	6
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++


Required details about room heater and combi heater with heat pump to regulation (EU) no. 813/2013 & 811/2013

		WPL 09 ICS classic compact plus set
		236728
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		x
Rated heating output in colder climates for average temperature applications (Prated)	kW	7
Rated heating output in moderate climates for average temperature applications (Prated)	kW	4
Rated heating output in warmer climates for average temperature applications (Prated)	kW	2
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,98
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	2,55
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	2,04
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,97
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	3,98
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	3,79
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	0
Dual mode temperature in moderate climates (Tbiv)	°C	-7
Seasonal room heating efficiency in colder climates for average temperature applications (ηs)	%	119
Seasonal room heating efficiency in moderate climates for average temperature applications (ηs)	%	130
Seasonal room heating efficiency in warmer climates for average temperature applications (ηs)	%	136
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,27
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		3,16
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,53
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		6,44
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,27
Tj = operating temperature limit under moderate climatic conditions (COPd)		1,85
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		0
Operating temperature limit (Tol)	°C	-10
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	21
Power consumption, thermostat OFF state (PTO)	W	56
Standby power consumption (PSB)	W	56
Power consumption, operating state, with crankcase heating (PCK)	W	26
Booster heater heating output (PSUB)	kW	0,71
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	32
Sound power level internal	dB(A)	45
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	5515
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2804
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	921
Flow rate, heat source side	m ³ /h	1240





ENERG Y IJA
 енергия · ενέργεια IE IA

STIEBEL ELTRON WPL 09 ICS classic



55 °C

35 °C

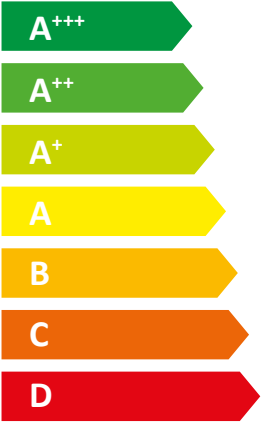

45 dB

32 dB

Two bar charts showing energy consumption in kW. The left chart has bars for 7, 4, and 2 kW. The right chart has bars for 7, 5, and 3 kW. A vertical line separates the two charts.

A map of Europe with different regions shaded in various shades of blue, corresponding to the energy consumption levels shown in the bar charts above.

2019

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPL 09 ICS classic
		236375
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Energy efficiency class for central heating in moderate climates for low temperature applications		A+++
Rated heating output in moderate climates for average temperature applications (Prated)	kW	4
Rated heating output in moderate climates for low temperature applications (Prated)	kW	5
Seasonal room heating efficiency in moderate climates for average temperature applications (η_s)	%	130
Seasonal room heating efficiency in moderate climates for low temperature applications (η_s)	%	178
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2804
Annual energy consumption in moderate climates for low temperature applications (QHE)	kWh/a	2187
Sound power level internal	dB(A)	45
Sound power level external	dB(A)	32
Special measures		For all special measures to be taken during assembly, installation or maintenance of the room heater, see the installation instructions
Rated heating output in colder climates for average temperature applications (Prated)	kW	7
Rated heating output in colder climates for low temperature applications (Prated)	kW	7
Rated heating output in warmer climates for average temperature applications (Prated)	kW	2
Rated heating output in warmer climates for low temperature applications (Prated)	kW	3
Seasonal room heating efficiency in colder climates for average temperature applications (η_s)	%	119
Seasonal room heating efficiency in colder climates for low temperature applications (η_s)	%	154
Seasonal room heating efficiency in warmer climates for average temperature applications (η_s)	%	136
Seasonal room heating efficiency in warmer climates for low temperature applications (η_s)	%	198
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	5515
Annual energy consumption in colder climates for low temperature applications (QHE)	kWh/a	4321
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	921
Annual energy consumption in warmer climates for low temperature applications (QHE)	kWh/a	701



ENERG

енергия · ενεργεια

Y


IJA



IE


IA


STIEBEL ELTRON


WPL 09 ICS classic





 



+ 


+ 


+ 

+ 





 


















Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

		WPL 09 ICS classic
		236375
Manufacturer		STIEBEL ELTRON
Seasonal room heating efficiency in moderate climates for average temperature applications (η_s)	%	130
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	134
Room heating energy efficiency of composite system under colder climatic conditions	%	123
Room heating energy efficiency of composite system under warmer climatic conditions	%	140
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	11
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	6
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++

Required details about room heater and combi heater with heat pump to regulation (EU) no. 813/2013 & 811/2013

		WPL 09 ICS classic
		236375
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		x
Rated heating output in colder climates for average temperature applications (Prated)	kW	7
Rated heating output in moderate climates for average temperature applications (Prated)	kW	4
Rated heating output in warmer climates for average temperature applications (Prated)	kW	2
Tj = -7 °C heating output, partial load range in colder climates (Pdh)	kW	4,1
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,98
Tj = 2 °C heating output, partial load range in colder climates (Pdh)	kW	2,62
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	2,55
Tj = 2 °C heating output, partial load range in warmer climates (Pdh)	kW	1,94
Tj = 7 °C heating output, partial load range in colder climates (Pdh)	kW	2,07
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	2,04
Tj = 7 °C heating output, partial load range in warmer climates (Pdh)	kW	1,84
Tj = 12 °C heating output, partial load range in colder climates (Pdh)	kW	1,99
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,97
Tj = 12 °C heating output, partial load range in warmer climates (Pdh)	kW	1,94
Tj = dual mode temperature in colder climates (Pdh)	kW	4,1
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	3,98
Tj = dual mode temperature in warmer climates (Pdh)	kW	2,39
Tj = operating temperature limit in colder climates (Pdh)	kW	3,16
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	3,79
Tj = operating temperature limit in warmer climates (Pdh)	kW	2,39
For air/water heat pumps: Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	0
Dual mode temperature in colder climates (Tbiv)	°C	-7
Dual mode temperature in moderate climates (Tbiv)	°C	-7
Dual mode temperature in warmer climates (Tbiv)	°C	2
Seasonal room heating efficiency in colder climates for average temperature applications (ηs)	%	119
Seasonal room heating efficiency in moderate climates for average temperature applications (ηs)	%	130
Seasonal room heating efficiency in warmer climates for average temperature applications (ηs)	%	136
Tj = -7 °C COP, partial load range in colder climates (COPd)		2,63
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,27
Tj = 2 °C COP, partial load range in colder climates (COPd)		3,64
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		3,16
Tj = 2 °C COP, partial load range in warmer climates (COPd)		2,33
Tj = 7 °C COP, partial load range in colder climates (COPd)		5,31
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,53
Tj = 7 °C COP, partial load range in warmer climates (COPd)		3,35
Tj = 12 °C COP, partial load range in colder climates (COPd)		7,11
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		6,44
Tj = 12 °C COP, partial load range in warmer climates (COPd)		5,39
Tj = dual mode temperature in colder climates (COPd)		2,63
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,27

Tj = dual mode temperature in warmer climates (COPd)		2,33
Tj = operating temperature limit in colder climates (COPd)		2,5
Tj = operating temperature limit under moderate climatic conditions (COPd)		1,85
Tj = operating temperature limit in warmer climates (COPd)		2,33
For air/water heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)		0
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	21
Power consumption, thermostat OFF state (PTO)	W	56
Standby power consumption (PSB)	W	56
Power consumption, operating state, with crankcase heating (PCK)	W	26
Booster heater heating output (PSUB)	kW	0,71
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	32
Sound power level internal	dB(A)	45
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	5515
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2804
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	921
Flow rate, heat source side	m ³ /h	1240
Special measures	For all special measures to be taken during assembly, installation or maintenance of the room heater, see the installation instructions	



ENERG
енергия · ενέργεια



STIEBEL ELTRON HSBC 200 L



55 W

189 L

2017

812/2013

Product datasheet: DHW cylinder to regulation (EU) no. 812/2013

		HSBC 200 L
		236684
Manufacturer		STIEBEL ELTRON
Model identification of the supplier		HSBC 200 L
Energy efficiency class		B
Standby losses	W	55
Cylinder capacity	l	189