



**ENERG** Y IJA  
 енергия · ενέργεια IE IA

**STIEBEL ELTRON**



WPL 07 ACS classic UK  
 compact plus Set S



A+



A



2019

811/2013

**Product datasheet: Combi heater to regulation (EU) no. 811/2013**

		<b>WPL 07 ACS classic UK compact plus Set S</b>
		238624
Manufacturer		STIEBEL ELTRON
Load profile		L
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Energy efficiency category for DHW heating under moderate climatic conditions		A
Rated heating output in moderate climates for average temperature applications (Prated)	kW	3
Rated heating output in moderate climates for low temperature applications (Prated)	kW	4
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2089
Annual energy consumption in moderate climates for low temperature applications (QHE)	kWh/a	1769
Annual power consumption in moderate climates (AEC)	kWh/a	940
Seasonal room heating efficiency in moderate climates for average temperature applications ( $\eta_s$ )	%	113
Seasonal room heating efficiency in moderate climates for low temperature applications ( $\eta_s$ )	%	166
Energy efficiency for DHW heating ( $\eta_{wh}$ ) under moderate climatic conditions	%	109
Sound power level external	dB(A)	52
Rated heating output in colder climates for average temperature applications (Prated)	kW	4
Rated heating output in colder climates for low temperature applications (Prated)	kW	3
Rated heating output in warmer climates for average temperature applications (Prated)	kW	3
Rated heating output in warmer climates for low temperature applications (Prated)	kW	3
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	4016
Annual energy consumption in colder climates for low temperature applications (QHE)	kWh/a	2186
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	1187
Annual energy consumption in warmer climates for low temperature applications (QHE)	kWh/a	783
Annual power consumption in colder climates (AEC)	kWh/a	949
Annual power consumption in warmer climates (AEC)	kWh/a	717
Seasonal room heating efficiency in colder climates for average temperature applications ( $\eta_s$ )	%	105
Seasonal room heating efficiency in colder climates for low temperature applications ( $\eta_s$ )	%	150
Seasonal room heating efficiency in warmer climates for average temperature applications ( $\eta_s$ )	%	139
Seasonal room heating efficiency in warmer climates for low temperature applications ( $\eta_s$ )	%	204
Energy efficiency for DHW heating ( $\eta_{wh}$ ) under colder climatic conditions	%	102
Energy efficiency for DHW heating ( $\eta_{wh}$ ) under warmer climatic conditions	%	134



# ENERG

енергия · ενέργεια



**STIEBEL ELTRON**

WPL 07 ACS classic UK compact plus Set S

Energy label components: boiler icon, radiator icon, tap icon, and energy class labels A+ and A.

Energy efficiency scale for heating (radiator icon). The scale ranges from A+++ (green) to G (red). The selected energy class is A+.

Energy label components: solar panel icon, hot water tank icon, control panel icon, boiler icon, and checkboxes.

Energy efficiency scale for hot water (tap icon). The scale ranges from A+++ (green) to G (red). The selected energy class is A.

**Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013**

		<b>WPL 07 ACS classic UK compact plus Set S</b>
		238624
Manufacturer		STIEBEL ELTRON
Seasonal room heating efficiency in moderate climates for average temperature applications ( $\eta_s$ )	%	113
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	117
Room heating energy efficiency of composite system under colder climatic conditions	%	109
Room heating energy efficiency of composite system under warmer climatic conditions	%	143
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	8
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	26
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Room heating energy efficiency class of composite system under moderate climatic conditions		A+
Energy efficiency category for DHW heating under moderate climatic conditions		A
Load profile		L

Required details about room heater and combi heater with heat pump to regulation (EU) no. 813/2013 & 811/2013

		WPL 07 ACS classic UK compact plus Set S
		238624
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		x
Rated heating output in colder climates for average temperature applications (Prated)	kW	4
Rated heating output in moderate climates for average temperature applications (Prated)	kW	3
Rated heating output in warmer climates for average temperature applications (Prated)	kW	3
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,1
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,6
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,3
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,5
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	2,4
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	3,1
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	0
Dual mode temperature in moderate climates (Tbiv)	°C	-5
Seasonal room heating efficiency in colder climates for average temperature applications (ηs)	%	105
Seasonal room heating efficiency in moderate climates for average temperature applications (ηs)	%	113
Seasonal room heating efficiency in warmer climates for average temperature applications (ηs)	%	139
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,07
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		2,93
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,13
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		5,97
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,17
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,07
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		0
Operating temperature limit (Tol)	°C	-7
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	17
Power consumption, thermostat OFF state (PTO)	W	30
Standby power consumption (PSB)	W	17
Power consumption, operating state, with crankcase heating (PCK)	W	5
Booster heater heating output (PSUB)	kW	2,93
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	52
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	4016
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2089
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	1187
Flow rate, heat source side	m <sup>3</sup> /h	1300
Load profile		L
Annual power consumption in colder climates (AEC)	kWh/a	949

Annual power consumption in moderate climates (AEC)	kWh/a	940
Annual power consumption in warmer climates (AEC)	kWh/a	717
Energy efficiency for DHW heating ( $\Gamma_{wh}$ ) under moderate climatic conditions	%	109




**ENERG** Y IJA  
 енергия · ενέργεια IE IA

**STIEBEL ELTRON** WPL 07 ACS classic



55 °C

35 °C

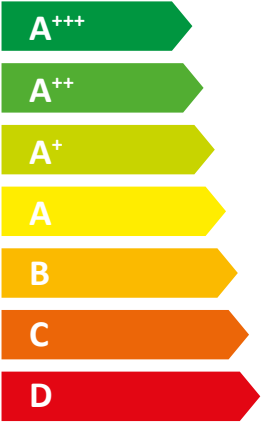

A+

A++

52 dB

■ 4	■ 3
■ 3	■ 4
■ 3	■ 3
kW	kW

2019

811/2013

**Product datasheet: Room heater to regulation (EU) no. 811/2013**

		<b>WPL 07 ACS classic</b>
		235920
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Rated heating output in moderate climates for average temperature applications (Prated)	kW	3
Rated heating output in moderate climates for low temperature applications (Prated)	kW	4
Seasonal room heating efficiency in moderate climates for average temperature applications ( $\eta_s$ )	%	113
Seasonal room heating efficiency in moderate climates for low temperature applications ( $\eta_s$ )	%	166
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2089
Annual energy consumption in moderate climates for low temperature applications (QHE)	kWh/a	1769
Sound power level external	dB(A)	52
Rated heating output in colder climates for average temperature applications (Prated)	kW	4
Rated heating output in colder climates for low temperature applications (Prated)	kW	3
Rated heating output in warmer climates for average temperature applications (Prated)	kW	3
Rated heating output in warmer climates for low temperature applications (Prated)	kW	3
Seasonal room heating efficiency in colder climates for average temperature applications ( $\eta_s$ )	%	105
Seasonal room heating efficiency in colder climates for low temperature applications ( $\eta_s$ )	%	150
Seasonal room heating efficiency in warmer climates for average temperature applications ( $\eta_s$ )	%	139
Seasonal room heating efficiency in warmer climates for low temperature applications ( $\eta_s$ )	%	204
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	4016
Annual energy consumption in colder climates for low temperature applications (QHE)	kWh/a	2186
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	1187
Annual energy consumption in warmer climates for low temperature applications (QHE)	kWh/a	783





# ENERG

енергия · ενεργεια

Y

IJA



IE

IA










**STIEBEL ELTRON**

WPL 07 ACS classic



+    
 +    
 +    
 + 

**Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013**

		<b>WPL 07 ACS classic</b>
		235920
Manufacturer		STIEBEL ELTRON
Seasonal room heating efficiency in moderate climates for average temperature applications ( $\eta_s$ )	%	113
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	117
Room heating energy efficiency of composite system under colder climatic conditions	%	109
Room heating energy efficiency of composite system under warmer climatic conditions	%	143
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	8
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	26
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Room heating energy efficiency class of composite system under moderate climatic conditions		A+

**Required details about room heater and combi heater with heat pump to regulation (EU) no. 813/2013 & 811/2013**

		<b>WPL 07 ACS classic</b>
		235920
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		-
Combi boiler with heat pump		-
Rated heating output in colder climates for average temperature applications (Prated)	kW	4
Rated heating output in moderate climates for average temperature applications (Prated)	kW	3
Rated heating output in warmer climates for average temperature applications (Prated)	kW	3
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,10
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,60
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,30
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,50
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	2,40
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	3,10
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	0,00
Dual mode temperature in moderate climates (Tbiv)	°C	-5
Seasonal room heating efficiency in colder climates for average temperature applications (ηs)	%	105
Seasonal room heating efficiency in moderate climates for average temperature applications (ηs)	%	113
Seasonal room heating efficiency in warmer climates for average temperature applications (ηs)	%	139
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,07
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		2,93
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,13
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		5,97
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,17
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,07
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		0,00
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	17,000
Power consumption, thermostat OFF state (PTO)	W	30
Standby power consumption (PSB)	W	17,000
Power consumption, operating state, with crankcase heating (PCK)	W	5,000
Booster heater heating output (PSUB)	kW	2,930
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	52
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	4016
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2089
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	1187
Flow rate, heat source side	m³/h	1300



**ENERG**  
енергия · ενέργεια



**STIEBEL ELTRON** HSBC 200 S (GB)



**55 W**

**189 L**

2017

812/2013

**Product datasheet: DHW cylinder to regulation (EU) no. 812/2013**

		<b>HSBC 200 S (GB)</b>
		236683
Manufacturer		STIEBEL ELTRON
Model identification of the supplier		HSBC 200 S (GB)
Energy efficiency class		B
Standby losses	W	55
Cylinder capacity	l	189