



ENERG Y IJA
 енергия · ενέργεια IE IA

STIEBEL ELTRON

HPA-O 4 CS Plus
 compact D Set S



A+



A

Two icons of a house with sound waves. The top icon shows sound waves coming from the house, and the bottom icon shows sound waves entering the house. Below the bottom icon is the text "52 dB".



A legend for power output levels, consisting of three colored squares with corresponding text: a dark blue square for "4 kW", a medium blue square for "5 kW", and a light blue square for "4 kW".

2019

811/2013

Product datasheet: Combi heater to regulation (EU) no. 811/2013

		HPA-O 4 CS Plus compact D Set S
		238997
Manufacturer		STIEBEL ELTRON
Load profile		L
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Energy efficiency category for DHW heating under moderate climatic conditions		A
Rated heating output in moderate climates for average temperature applications (Prated)	kW	4
Rated heating output in moderate climates for low temperature applications (Prated)	kW	5
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2618
Annual energy consumption in moderate climates for low temperature applications (QHE)	kWh/a	2265
Annual power consumption in moderate climates (AEC)	kWh/a	905
Seasonal room heating efficiency in moderate climates for average temperature applications (η_s)	%	113
Seasonal room heating efficiency in moderate climates for low temperature applications (η_s)	%	163
Energy efficiency for DHW heating (η_{wh}) under moderate climatic conditions	%	113
Sound power level external	dB(A)	52
Rated heating output in colder climates for average temperature applications (Prated)	kW	5
Rated heating output in colder climates for low temperature applications (Prated)	kW	4
Rated heating output in warmer climates for average temperature applications (Prated)	kW	3
Rated heating output in warmer climates for low temperature applications (Prated)	kW	4
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	4884
Annual energy consumption in colder climates for low temperature applications (QHE)	kWh/a	2757
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	1467
Annual energy consumption in warmer climates for low temperature applications (QHE)	kWh/a	889
Annual power consumption in colder climates (AEC)	kWh/a	949
Annual power consumption in warmer climates (AEC)	kWh/a	717
Seasonal room heating efficiency in colder climates for average temperature applications (η_s)	%	105
Seasonal room heating efficiency in colder climates for low temperature applications (η_s)	%	150
Seasonal room heating efficiency in warmer climates for average temperature applications (η_s)	%	139
Seasonal room heating efficiency in warmer climates for low temperature applications (η_s)	%	206
Energy efficiency for DHW heating (η_{wh}) under colder climatic conditions	%	102
Energy efficiency for DHW heating (η_{wh}) under warmer climatic conditions	%	139



ENERG

енергия · ενέργεια

Y


IJA

IE


IA

STIEBEL ELTRON


HPA-O 4 CS Plus compact D Set S

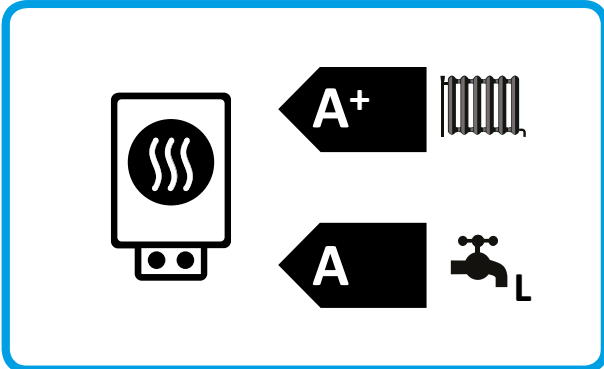


Energy label for heating system showing a boiler icon, a radiator icon, and a tap icon. The heating system is rated A+ and the tap is rated A.

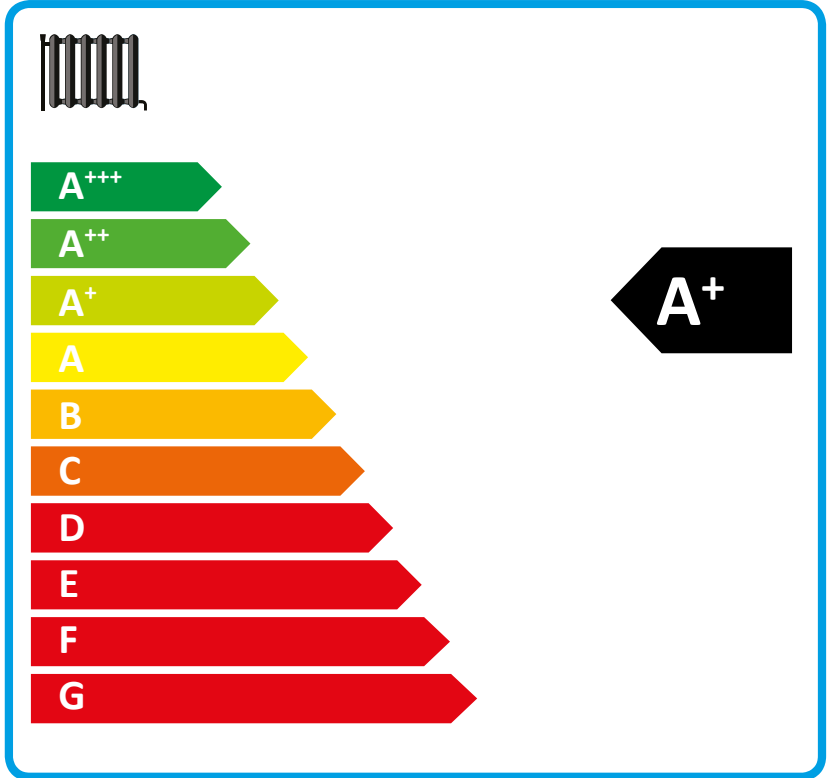

Energy scale for heating system with a radiator icon. The scale ranges from A+++ (green) to G (red). A black arrow points to the A+ rating.



Energy label for hot water system showing a solar panel icon, a hot water tank icon, a control panel icon, and a boiler icon. The solar panel, hot water tank, and boiler are marked with a plus sign and an empty box. The control panel is marked with a plus sign and a box containing an 'X'.

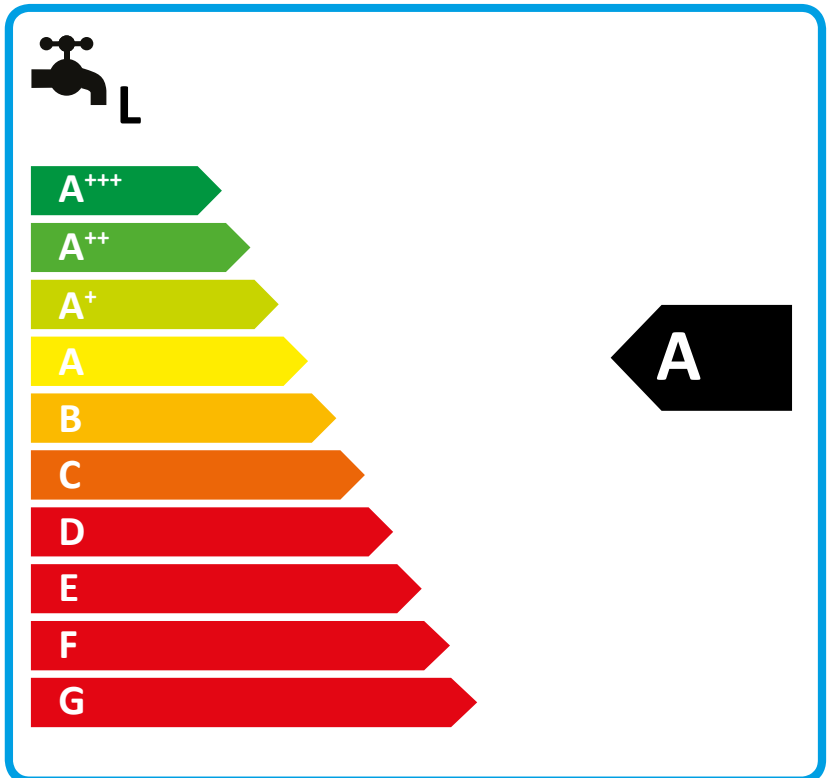

Energy scale for hot water system with a tap icon. The scale ranges from A+++ (green) to G (red). A black arrow points to the A rating.

Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

		HPA-O 4 CS Plus compact D Set S
		238997
Manufacturer		STIEBEL ELTRON
Seasonal room heating efficiency in moderate climates for average temperature applications (η_s)	%	113
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	117
Room heating energy efficiency of composite system under colder climatic conditions	%	109
Room heating energy efficiency of composite system under warmer climatic conditions	%	143
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	8
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	26
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Room heating energy efficiency class of composite system under moderate climatic conditions		A+
Energy efficiency category for DHW heating under moderate climatic conditions		A
Load profile		L

Required details about room heater and combi heater with heat pump to regulation (EU) no. 813/2013 & 811/2013

		HPA-O 4 CS Plus compact D Set S
		238997
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		x
Rated heating output in colder climates for average temperature applications (Prated)	kW	5
Rated heating output in moderate climates for average temperature applications (Prated)	kW	4
Rated heating output in warmer climates for average temperature applications (Prated)	kW	3
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,4
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	2
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,3
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,5
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	3
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	3,4
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	0
Dual mode temperature in moderate climates (Tbiv)	°C	-5
Seasonal room heating efficiency in colder climates for average temperature applications (ηs)	%	105
Seasonal room heating efficiency in moderate climates for average temperature applications (ηs)	%	113
Seasonal room heating efficiency in warmer climates for average temperature applications (ηs)	%	139
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,05
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		2,94
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,13
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		5,97
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,15
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,05
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		0
Operating temperature limit (Tol)	°C	-7
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	17
Power consumption, thermostat OFF state (PTO)	W	30
Standby power consumption (PSB)	W	17
Power consumption, operating state, with crankcase heating (PCK)	W	5
Booster heater heating output (PSUB)	kW	3,69
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	52
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	4884
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2618
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	1467
Flow rate, heat source side	m ³ /h	1300
Load profile		L
Daily power consumption (Qelec)	kWh	4,31

Annual power consumption in colder climates (AEC)	kWh/a	949
Annual power consumption in moderate climates (AEC)	kWh/a	905
Annual power consumption in warmer climates (AEC)	kWh/a	717
Energy efficiency for DHW heating (Γ_{wh}) under moderate climatic conditions	%	113



ENERG
енергия · ενέργεια



STIEBEL ELTRON HSBC 200 S



55 W

189 L

2017

812/2013

Product datasheet: DHW cylinder to regulation (EU) no. 812/2013

		HSBC 200 S
		234801
Manufacturer		STIEBEL ELTRON
Model identification of the supplier		HSBC 200 S
Energy efficiency class		B
Standby losses	W	55
Cylinder capacity	l	189







ENERG

енергия · ενέργεια



STIEBEL ELTRON

HPA-O 4 CS Plus

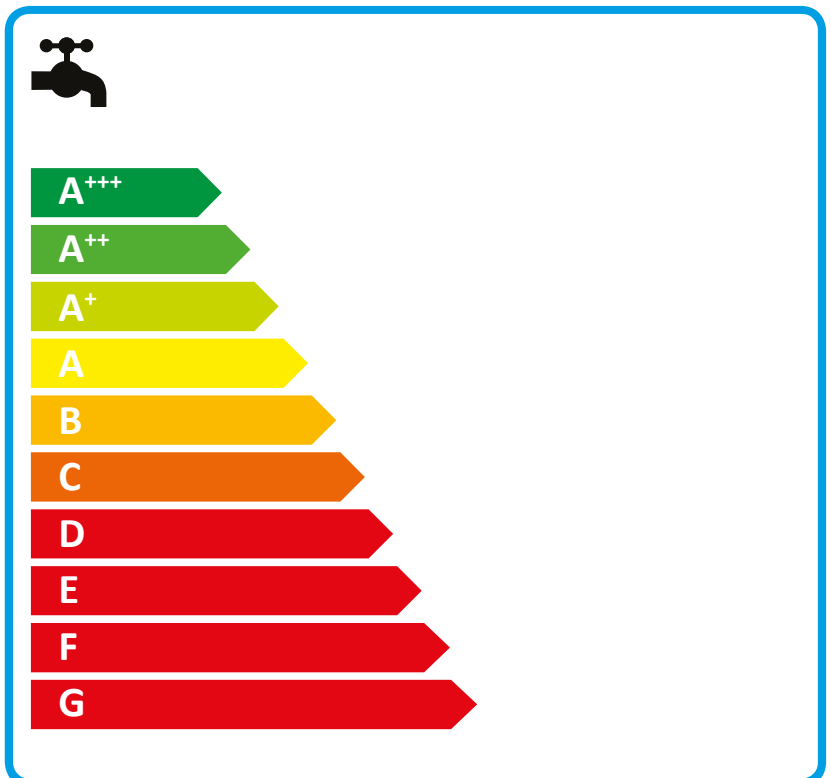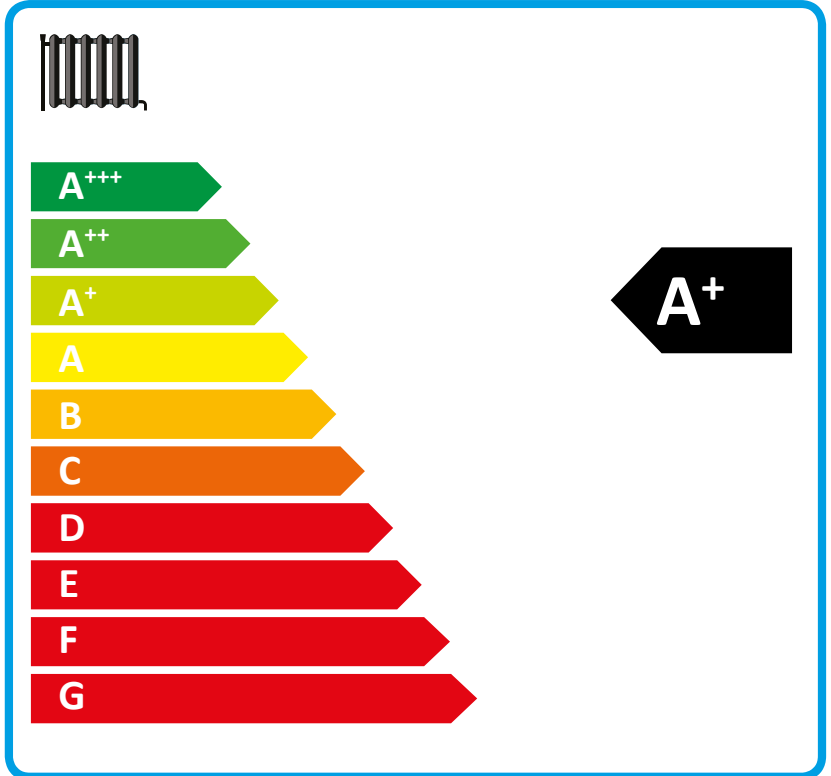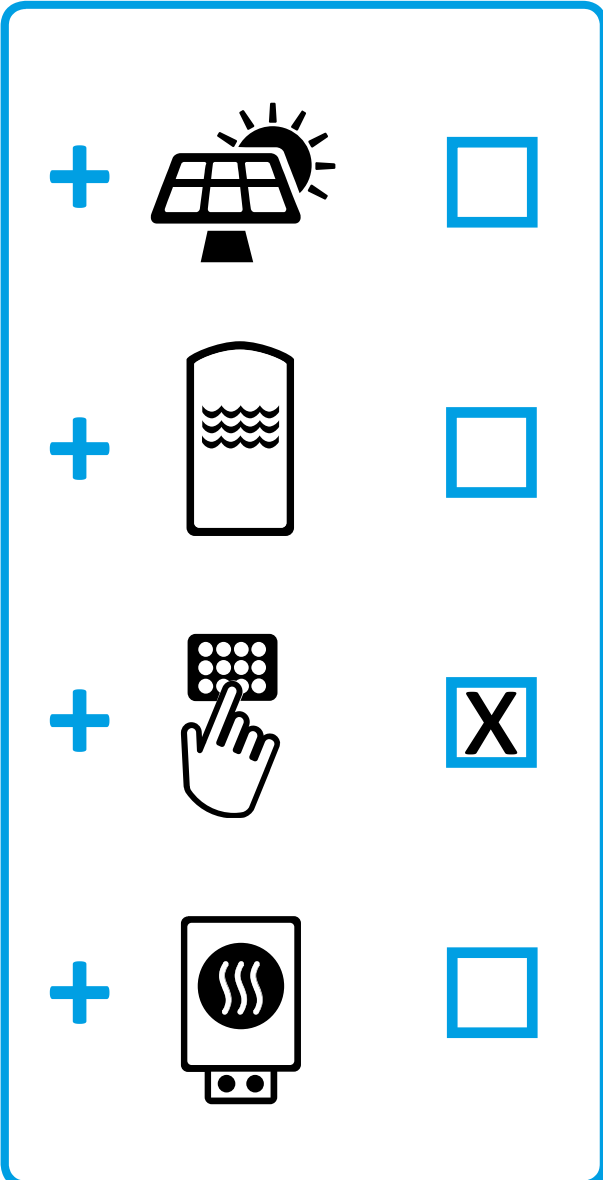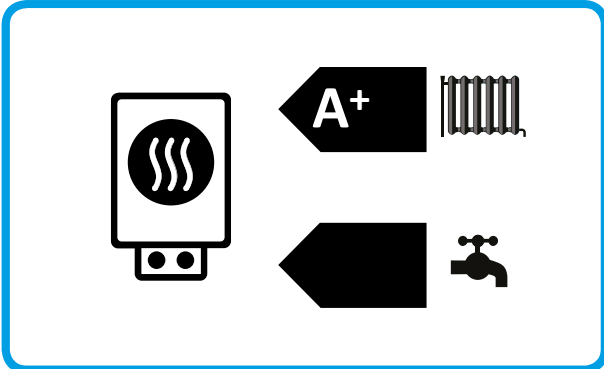

Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

		HPA-O 4 CS Plus
		238985
Manufacturer		STIEBEL ELTRON
Seasonal room heating efficiency in moderate climates for average temperature applications (η_s)	%	113
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	117
Room heating energy efficiency of composite system under colder climatic conditions	%	109
Room heating energy efficiency of composite system under warmer climatic conditions	%	143
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	8
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	26
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Room heating energy efficiency class of composite system under moderate climatic conditions		A+

Required details about room heater and combi heater with heat pump to regulation (EU) no. 813/2013 & 811/2013

		HPA-O 4 CS Plus
		238985
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		-
Combi boiler with heat pump		-
Rated heating output in colder climates for average temperature applications (Prated)	kW	5
Rated heating output in moderate climates for average temperature applications (Prated)	kW	4
Rated heating output in warmer climates for average temperature applications (Prated)	kW	3
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,4
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	2
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,3
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,5
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	3
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	3,4
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	0
Dual mode temperature in moderate climates (Tbiv)	°C	-5
Seasonal room heating efficiency in colder climates for average temperature applications (ηs)	%	105
Seasonal room heating efficiency in moderate climates for average temperature applications (ηs)	%	113
Seasonal room heating efficiency in warmer climates for average temperature applications (ηs)	%	139
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,05
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		2,94
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,13
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		5,97
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,15
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,05
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		0
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	17
Power consumption, thermostat OFF state (PTO)	W	30
Standby power consumption (PSB)	W	17
Power consumption, operating state, with crankcase heating (PCK)	W	5
Booster heater heating output (PSUB)	kW	3,69
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	52
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	4884
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	2618
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	1467
Flow rate, heat source side	m³/h	1300