




# ENERG

енергия · ενέργεια




## STIEBEL ELTRON

WPL 07 ACS classic  
compact Set 1.1

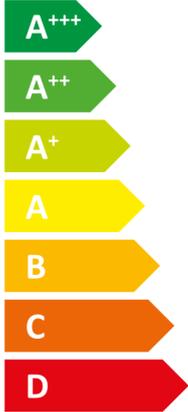

**A+**

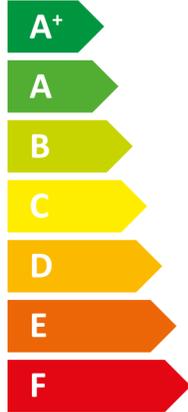

**A**

**52dB**



- 4 kW
- **4 kW**
- 3 kW

2019

811/2013


**Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)**

		<b>WPL 07 ACS classic compact Set 1.1</b>
		204257
Manufacturer		STIEBEL ELTRON
Load profile		L
Space heating energy efficiency class under average climate conditions, medium-temperature applications		A+
Energy efficiency class, space heating under average climate conditions, low-temperature applications		A++
Energy efficiency class, DHW heating under average climate conditions		A
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	4
Rated heating output under average climate conditions for low-temperature applications (P rated)	kW	4
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	2089
Annual energy consumption under average climate conditions for low-temperature applications (QHE)	kWh/a	1769
Annual power consumption under average climate conditions (AEC)	kWh/a	880
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications ( $\eta_s$ )	%	116
Seasonal space heating energy efficiency under average climate conditions for low-temperature applications ( $\eta_s$ )	%	166
Energy efficiency, DHW heating ( $\eta_{wh}$ ), under average climate conditions	%	116
Option for operation only at off-peak times		-
Special measures		Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation- und Montageanweisung
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	4
Rated heating output under colder climate conditions for low-temperature applications (P rated)	kW	3
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	3
Rated heating output under warmer climate conditions for low-temperature applications (P rated)	kW	3
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	4016
Annual energy consumption under colder climate conditions for low-temperature applications (QHE)	kWh/a	2186
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	1187
Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)	kWh/a	783
Annual power consumption under colder climate conditions (AEC)	kWh	880,000
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications ( $\eta_s$ )	%	102
Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications ( $\eta_s$ )	%	148
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications ( $\eta_s$ )	%	137
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications ( $\eta_s$ )	%	200
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications ( $\eta_s$ )	%	200
Sound power level, outdoor	dB(A)	52



# ENERG

енергия · ενέργεια



WPL 07 ACS classic compact Set 1.1


## STIEBEL ELTRON










+ 

+ 

+ 

+ 





		WPL 07 ACS classic compact Set 1.1
		204257
Manufacturer		STIEBEL ELTRON
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications ( $\eta_s$ )	%	116
Temperature control class		VI
Contribution of temperature control to space heating energy efficiency	%	4
Space heating energy efficiency of package under average climate conditions	%	120
Space heating energy efficiency of package under colder climate conditions	%	109
Space heating energy efficiency of package under warmer climate conditions	%	143
Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions	%	8
Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions	%	26
Space heating energy efficiency class under average climate conditions, medium-temperature applications		A+
Space heating energy efficiency class of package under average climate conditions		A+
Energy efficiency class, DHW heating under average climate conditions		A
Load profile		L

		WPL 07 ACS classic compact Set 1.1
		204257
Manufacturer		STIEBEL ELTRON
Heat source		Luft
Low temperature heat pump		-
With auxiliary heater		-
Combination heater with heat pump		-
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	4
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	4
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	3
Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	2,65
Tj = -7 °C heating output, partial load range under average climate conditions (Pdh)	kW	3,1
Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh)	kW	1,6
Tj = 2 °C heating output, partial load range under average climate conditions (Pdh)	kW	1,6
Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	3,1
Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	1,3
Tj = 7 °C heating output, partial load range under average climate conditions (Pdh)	kW	1,3
Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	2,0
Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh)	kW	1,5
Tj = 12 °C heating output, partial load range under average climate conditions (Pdh)	kW	1,5
Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	1,5
Tj = dual mode temperature under colder climate conditions (Pdh)	kW	3,0
Tj = dual mode temperature under average climate conditions (Pdh)	kW	2,4
Tj = dual mode temperature under warmer climate conditions (Pdh)	kW	3,1
Tj = operating temperature limit under colder climate conditions (Pdh)	kW	2,6
Tj = operating temperature limit under average climate conditions (Pdh)	kW	3,1
Tj = operating temperature limit under warmer climate conditions (Pdh)	kW	3,1
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	0,0
Dual mode temperature under colder climate conditions (Tbiv)	°C	-10
Dual mode temperature under average climate conditions (Tbiv)	°C	-5
Dual mode temperature under warmer climate conditions (Tbiv)	°C	2
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs)	%	102
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs)	%	116
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs)	%	137
Tj = -7 °C COP, partial load range under colder climate conditions (COPd)		3,45
Tj = -7 °C COP, partial load range under average climate conditions (COPd)		2,07
Tj = 2 °C COP, partial load range under colder climate conditions (COPd)		3,45
Tj = 2 °C COP, partial load range under average climate conditions (COPd)		2,93
Tj = 2 °C COP, partial load range under warmer climate conditions (COPd)		2,19
Tj = 7 °C COP, partial load range under colder climate conditions (COPd)		4,66
Tj = 7 °C COP, partial load range under average climate conditions (COPd)		4,13
Tj = 7 °C COP, partial load range under warmer climate conditions (COPd)		3,27
Tj = 12 °C COP, partial load range under colder climate conditions (COPd)		6,65
Tj = 12 °C COP, partial load range under average climate conditions (COPd)		5,97
Tj = 12 °C COP, partial load range under warmer climate conditions (COPd)		5,15
Tj = dual mode temperature under colder climate conditions (COPd)		2,09
Tj = dual mode temperature under average climate conditions (COPd)		2,17
Tj = dual mode temperature under warmer climate conditions (COPd)		2,19
Tj = operating temperature limit under colder climate conditions (COPd)		2,30
Tj = operating temperature limit under average climate conditions (COPd)		2,07
Tj = operating temperature limit under warmer climate conditions (COPd)		2,19
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)		1,90
Operating temperature limit under colder climate conditions (TOL)	°C	-15
Operating temperature limit under average climate conditions (TOL)	°C	-5
Operating temperature limit under warmer climate conditions (TOL)	°C	2
Operating temperature limit of heating water under colder climate conditions (WTOL)	°C	60
Operating temperature limit of heating water under average climate conditions (WTOL)	°C	60

Operating temperature limit of heating water under warmer climate conditions (WTOL)	°C	60
Power consumption, off-mode (Poff)	W	17
Power consumption, thermostat off-mode (PTO)	W	30
Power consumption, standby state (PSB)	W	17
Power consumption, operating state, with crankcase heating (PCK)	W	5
Rated heating output of auxiliary heater under average climate conditions (PSUP)	kW	2,9
Type of energy supply, auxiliary heater		elektrisch
Output control		veränderlich
Sound power level, outdoor	dB(A)	52
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	4016
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	2089
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	1187
Flow rate on heat source side	m <sup>3</sup> /h	1300
Load profile		L
Daily power consumption under average climate conditions (QELEC)	kWh	4,230
Annual power consumption under colder climate conditions (AEC)	kWh	880,000
Annual power consumption under average climate conditions (AEC)	kWh/a	880
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications ( $\eta_s$ )	%	200
Energy efficiency, DHW heating ( $\eta_{wh}$ ), under average climate conditions	%	116
Special measures		Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation- und Montageanweisung