



ENERG
енергия · ενέργεια


Y IJA
IE IA

STIEBEL ELTRON

LWZ 504



A++

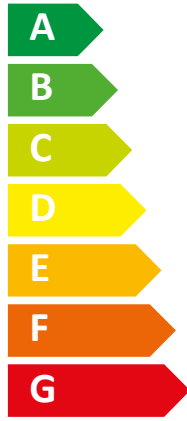

A

Two icons showing sound power levels. The top icon shows a speaker inside a house with the text "50 dB". The bottom icon shows a speaker outside a house with the text "50 dB".



A legend for power output levels, consisting of three colored squares with corresponding text: a dark blue square for "14 kW", a medium blue square for "10 kW", and a light blue square for "9 kW".

2015

811/2013

		LWZ 504
		233514
Manufacturer		STIEBEL ELTRON
Load profile		XL
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Energy efficiency category for DHW heating under moderate climatic conditions		A
Rated heating output in moderate climates for medium temperature applications	kW	7
Rated heating output in moderate climates for low temperature applications	kW	10
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	4199
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	4755
Energy consumption for DHW heating under moderate climatic conditions	kWh/a	1676
Energy efficiency for central heating in moderate climates for medium temperature applications	%	128
Energy efficiency for central heating in moderate climates for low temperature applications	%	163
Energy efficiency for DHW heating (η_{wh}) under moderate climatic conditions	%	102
Sound power level internal	dB(A)	50
{Spezielle Vorsichtsmaßnahmen}		Alle spezifischen Vorkehrungen bei Montage, Installation und Wartung sind in der Bedienungs- und Installationsanleitung beschrieben.
Rated heating output in colder climates for medium temperature applications	kW	11
Rated heating output in colder climates for low temperature applications	kW	14
Rated heating output in warmer climates for medium temperature applications	kW	8
Rated heating output in warmer climates for low temperature applications	kW	9
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	9932
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	10498
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	2911
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	2243
Energy consumption for DHW heating under colder climatic conditions	kWh/a	2042
Energy consumption for DHW heating under warmer climatic conditions	kWh/a	1183
Energy efficiency for central heating in colder climates for medium temperature applications	%	102
Energy efficiency for central heating in colder climates for low temperature applications	%	131
Energy efficiency for central heating in warmer climates for medium temperature applications	%	150
Energy efficiency for central heating in warmer climates for low temperature applications	%	207
Energy efficiency for DHW heating (η_{wh}) under colder climatic conditions	%	84
Energy efficiency for DHW heating (η_{wh}) under warmer climatic conditions	%	145
Sound power level external	dB(A)	50



ENERG

енергия · ενέργεια

Y

IJA

IE

IA

STIEBEL ELTRON

LWZ 504

A++

A

XL

A+++

A++

A+

A

B

C

D

E

F

G

A++

+

+

+

+

X

XL

A+++

A++

A+

A

B

C

D

E

F

G

A

Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

		LWZ 504
		233514
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	128
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	132
Room heating energy efficiency of composite system under colder climatic conditions	%	106
Room heating energy efficiency of composite system under warmer climatic conditions	%	154
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	26
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	22
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++
Energy efficiency category for DHW heating under moderate climatic conditions		A
Load profile		XL

		LWZ 504
		233514
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		x
Rated heating output in moderate climates for medium temperature applications	kW	7
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	5,87
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,52
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	2,72
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,2
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	5,87
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	2,67
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,26
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		3,27
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,14
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		5,29
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,26
Tj = operating temperature limit under moderate climatic conditions (COPd)		1,88
Dual mode temperature (Tbiv)	°C	-7
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	27
Power consumption, thermostat OFF state (PTO)	W	63
Standby power consumption (PSB)	W	27
Power consumption, operating state, with crankcase heating (PCK)	W	35
Booster heater heating output (PSUB)	kW	3,97
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	50
Sound power level internal	dB(A)	50
Load profile		XL
Energy efficiency for DHW heating (η_{wh}) under moderate climatic conditions	%	102
Daily power consumption (Qelec)	kWh	7,14