





**ENERG** Y IJA  
 енергия · ενέργεια IE IA

**STIEBEL ELTRON**

WPL 13 ACS classic  
 compact set S



**A+**

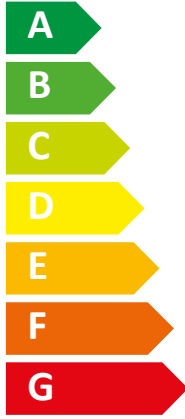

**A**

Two icons of a house with sound waves. The top icon shows sound waves coming from the house, and the bottom icon shows sound waves entering the house. Below the bottom icon is the text "57 dB".



A legend box containing three entries: a dark blue square next to "6 kW", a medium blue square next to "7 kW", and a light blue square next to "6 kW".

2015

811/2013

**WPL 13 ACS classic compact set S**

239046

Manufacturer		STIEBEL ELTRON
Load profile		L
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Energy efficiency class for central heating in moderate climates for low temperature applications		A+++
Energy efficiency category for DHW heating under moderate climatic conditions		A
Rated heating output in moderate climates for medium temperature applications	kW	6
Rated heating output in moderate climates for low temperature applications	kW	7
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	4917
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	3038
Energy consumption for DHW heating under moderate climatic conditions	kWh/a	940
Energy efficiency for central heating in moderate climates for medium temperature applications	%	124
Energy efficiency for central heating in moderate climates for low temperature applications	%	182
Energy efficiency for DHW heating ( $\eta_{wh}$ ) under moderate climatic conditions	%	109
Rated heating output in colder climates for medium temperature applications	kW	7
Rated heating output in colder climates for low temperature applications	kW	6
Rated heating output in warmer climates for medium temperature applications	kW	7
Rated heating output in warmer climates for low temperature applications	kW	6
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	5564
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	3675
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	2128
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	1533
Energy consumption for DHW heating under colder climatic conditions	kWh/a	949
Energy consumption for DHW heating under warmer climatic conditions	kWh/a	717
Energy efficiency for central heating in colder climates for medium temperature applications	%	112
Energy efficiency for central heating in colder climates for low temperature applications	%	153
Energy efficiency for central heating in warmer climates for medium temperature applications	%	160
Energy efficiency for central heating in warmer climates for low temperature applications	%	217
Energy efficiency for DHW heating ( $\eta_{wh}$ ) under colder climatic conditions	%	102
Energy efficiency for DHW heating ( $\eta_{wh}$ ) under warmer climatic conditions	%	141
Sound power level external	dB(A)	57



# ENERG

енергия · ενέργεια



**STIEBEL ELTRON**

WPL 13 ACS classic compact set S

Energy label for heating system showing a boiler icon, a radiator icon, and a tap icon. The heating system is rated A+ and the tap is rated A.

Energy label for radiator showing a radiator icon. The radiator is rated A++.

Energy label for solar panel, hot water tank, control panel, and boiler. Each component is shown with a plus sign and a square box. The solar panel, hot water tank, and boiler have empty boxes, while the control panel has an 'X' in its box.

Energy label for tap showing a tap icon. The tap is rated A.

**Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013**

		<b>WPL 13 ACS classic compact set S</b>
		239046
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	124
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	128
Room heating energy efficiency of composite system under colder climatic conditions	%	116
Room heating energy efficiency of composite system under warmer climatic conditions	%	164
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	12
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	36
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Room heating energy efficiency class of composite system under moderate climatic conditions		A++
Energy efficiency category for DHW heating under moderate climatic conditions		A
Load profile		L

**WPL 13 ACS classic compact set S**

239046

Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		x
Rated heating output in moderate climates for medium temperature applications	kW	6
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	5,1
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	4,1
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	2,6
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,3
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	6,1
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	5,1
For air/water heat pumps:Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	0
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		1,97
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		3,18
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,56
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		5,98
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,28
Tj = operating temperature limit under moderate climatic conditions (COPd)		1,97
For air/water heat pumps:Tj = -15 °C (if TOL < -20 °C) (COPd)		0
Dual mode temperature (Tbiv)	°C	-10
Operating temperature limit (Tol)	°C	-7
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	17
Power consumption, thermostat OFF state (PTO)	W	30
Standby power consumption (PSB)	W	17
Power consumption, operating state, with crankcase heating (PCK)	W	5
Booster heater heating output (PSUB)	kW	7,55
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	57
Flow rate, heat source side	m <sup>3</sup> /h	2200
Load profile		L
Energy efficiency for DHW heating ( $\eta_{wh}$ ) under moderate climatic conditions	%	109



**ENERG**  
енергия · ενέργεια



**STIEBEL ELTRON** HSBB 200 S



**55 W**

**191 L**

2017

812/2013

**Product datasheet: DHW cylinder to regulation (EU) no. 812/2013**

		<b>HSBB 200 S</b>
		235197
Manufacturer		STIEBEL ELTRON
Model identification of the supplier		HSBB 200 S
Energy efficiency class		B
Standby losses	W	55
Cylinder capacity	l	191