



ENERG Y IJA
 енергия · ενέργεια IE IA

STIEBEL ELTRON WPL 15 ACS compact set



55 °C

35 °C



A++

A++

50 dB

■ 12	■ 11
■ 8	■ 8
■ 4	■ 4
kW	kW

2015

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPL 15 ACS compact set
		239074
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Rated heating output in moderate climates for medium temperature applications	kW	8
Rated heating output in moderate climates for low temperature applications	kW	8
Energy efficiency for central heating in moderate climates for medium temperature applications	%	127
Energy efficiency for central heating in moderate climates for low temperature applications	%	176
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	5300
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	3796
Rated heating output in colder climates for medium temperature applications	kW	12
Rated heating output in colder climates for low temperature applications	kW	11
Rated heating output in warmer climates for medium temperature applications	kW	4
Rated heating output in warmer climates for low temperature applications	kW	4
Energy efficiency for central heating in colder climates for medium temperature applications	%	119
Energy efficiency for central heating in colder climates for low temperature applications	%	157
Energy efficiency for central heating in warmer climates for medium temperature applications	%	142
Energy efficiency for central heating in warmer climates for low temperature applications	%	206
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	9481
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	7029
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	1750
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	1344
Sound power level external	dB(A)	50



ENERG

енергия · ενεργεια





STIEBEL ELTRON

WPL 15 ACS compact set





+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>

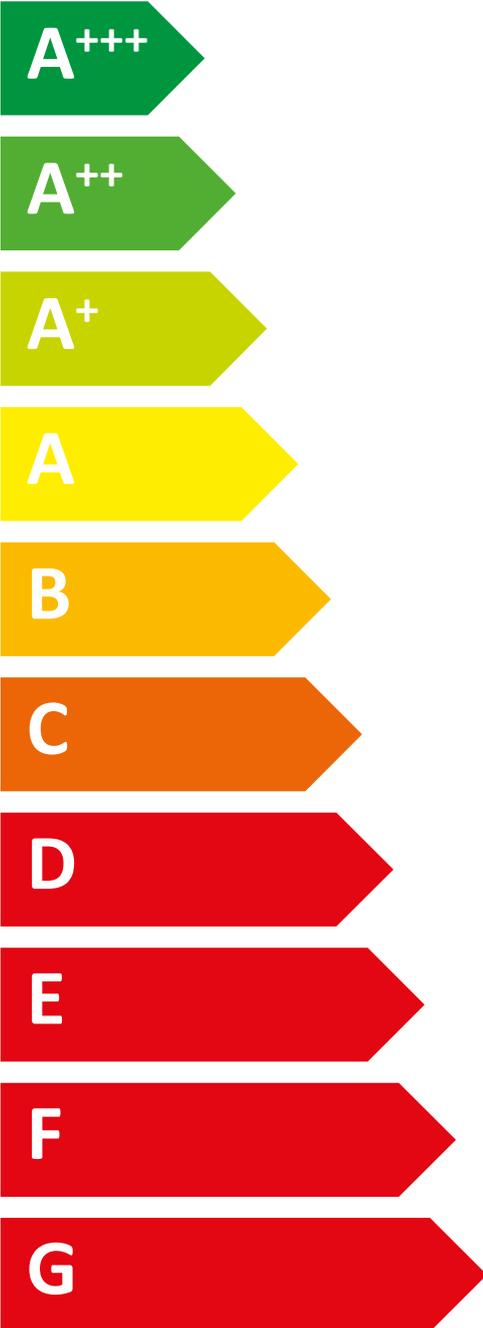


Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

		WPL 15 ACS compact set
		239074
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	127
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	131
Room heating energy efficiency of composite system under colder climatic conditions	%	123
Room heating energy efficiency of composite system under warmer climatic conditions	%	146
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	8
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	15
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++

Product datasheet: Temperature controller to regulation (EU) no. 811/2013

		WPL 15 ACS compact set
		239074
Manufacturer		STIEBEL ELTRON
With booster heater		x
Combi boiler with heat pump		-
Rated heating output in moderate climates for medium temperature applications	kW	8
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	6,8
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	4,3
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	4,5
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	4,4
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	7,1
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	7,7
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	9,2
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,89
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		4,44
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		5,48
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		6,70
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,82
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,70
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		2,49
Dual mode temperature (Tbiv)	°C	-8
Heating water operating temperature limit (WTOL)	°C	65
Power consumption, OFF state (Poff)	W	16
Power consumption, thermostat OFF state (PTO)	W	16
Standby power consumption (PSB)	W	16
Power consumption, operating state, with crankcase heating (PCK)	W	43
Booster heater heating output (PSUB)	kW	0,00
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	50
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	5300
Flow rate, heat source side	m ³ /h	2300



ENERG
енергия · ενέργεια



STIEBEL ELTRON HSBB 3



79 W

189 L

2017

812/2013

Product datasheet: DHW cylinder to regulation (EU) no. 812/2013

		HSBB 3
		234264
Manufacturer		STIEBEL ELTRON
Designation		HSBB 3
Energy efficiency class		C
Standby losses	W	79
Cylinder capacity	l	189



ENERG Y IJA
енергия · ενέργεια IE IA

STIEBEL ELTRON WPL 15 ACS



55 °C

35 °C



A++

A++

Icon of a house with sound waves emanating from it, representing sound power level.

Icon of a house with sound waves entering it, representing sound pressure level.

50 dB

■ 12
■ 8
■ 4
kW

■ 11
■ 8
■ 4
kW



2015

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPL 15 ACS
		236639
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Rated heating output in moderate climates for medium temperature applications	kW	8
Rated heating output in moderate climates for low temperature applications	kW	8
Energy efficiency for central heating in moderate climates for medium temperature applications	%	127
Energy efficiency for central heating in moderate climates for low temperature applications	%	176
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	5300
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	3796
Rated heating output in colder climates for medium temperature applications	kW	12
Rated heating output in colder climates for low temperature applications	kW	11
Rated heating output in warmer climates for medium temperature applications	kW	4
Rated heating output in warmer climates for low temperature applications	kW	4
Energy efficiency for central heating in colder climates for medium temperature applications	%	119
Energy efficiency for central heating in colder climates for low temperature applications	%	157
Energy efficiency for central heating in warmer climates for medium temperature applications	%	142
Energy efficiency for central heating in warmer climates for low temperature applications	%	206
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	9481
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	7029
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	1750
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	1344
Sound power level external	dB(A)	50



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

STIEBEL ELTRON

WPL 15 ACS



A⁺⁺

A⁺⁺⁺

A⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G

+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>

Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

		WPL 15 ACS
		236639
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	127
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	131
Room heating energy efficiency of composite system under colder climatic conditions	%	123
Room heating energy efficiency of composite system under warmer climatic conditions	%	146
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	8
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	15
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++

Product datasheet: Temperature controller to regulation (EU) no. 811/2013

		WPL 15 ACS
		236639
Manufacturer		STIEBEL ELTRON
With booster heater		x
Combi boiler with heat pump		-
Rated heating output in moderate climates for medium temperature applications	kW	8
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	6,8
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	4,3
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	4,5
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	4,4
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	7,1
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	7,7
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	9,2
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,89
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		4,44
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		5,48
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		6,70
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,82
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,70
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		2,49
Dual mode temperature (Tbiv)	°C	-8
Heating water operating temperature limit (WTOL)	°C	65
Power consumption, OFF state (Poff)	W	16
Power consumption, thermostat OFF state (PTO)	W	16
Standby power consumption (PSB)	W	16
Power consumption, operating state, with crankcase heating (PCK)	W	43
Booster heater heating output (PSUB)	kW	0,00
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	50
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	5300
Flow rate, heat source side	m ³ /h	2300