



ENERG Y IJA
 енергия · ενέργεια IE IA

STIEBEL ELTRON WPL 20 A comfort Set



55 °C

35 °C



A++

A+++

54 dB

■ 17	■ 15
■ 12	■ 11
■ 8	■ 7
kW	kW

2019

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPL 20 A comfort Set
		239092
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Energy efficiency class for central heating in moderate climates for low temperature applications		A+++
Rated heating output in moderate climates for medium temperature applications	kW	12
Rated heating output in moderate climates for low temperature applications	kW	11
Energy efficiency for central heating in moderate climates for medium temperature applications	%	143
Energy efficiency for central heating in moderate climates for low temperature applications	%	185
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	6801
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	4839
Rated heating output in colder climates for medium temperature applications	kW	17
Rated heating output in colder climates for low temperature applications	kW	15
Rated heating output in warmer climates for medium temperature applications	kW	8
Rated heating output in warmer climates for low temperature applications	kW	7
Energy efficiency for central heating in colder climates for medium temperature applications	%	132
Energy efficiency for central heating in colder climates for low temperature applications	%	165
Energy efficiency for central heating in warmer climates for medium temperature applications	%	163
Energy efficiency for central heating in warmer climates for low temperature applications	%	214
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	12405
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	8804
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	2581
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	1720
Sound power level external	dB(A)	54



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

STIEBEL ELTRON

WPL 20 A comfort Set






+ 
 + 
 + 
 + 









		WPL 20 A comfort Set
		239092
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	143
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	138
Room heating energy efficiency of composite system under colder climatic conditions	%	133
Room heating energy efficiency of composite system under warmer climatic conditions	%	144
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	5
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	6
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++

		WPL 20 A comfort Set
		239092
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		-
Rated heating output in moderate climates for medium temperature applications	kW	12
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	10,6
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	8,4
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	7,8
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	9,0
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	9,9
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	9,48
For air/water heat pumps:Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	9,48
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,69
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		3,51
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,61
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		6,66
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,81
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,29
For air/water heat pumps:Tj = -15 °C (if TOL < -20 °C) (COPd)		2,29
Dual mode temperature (Tbiv)	°C	-5
Operating temperature limit (Tol)	°C	-10
Heating water operating temperature limit (WTOL)	°C	65
Power consumption, OFF state (Poff)	W	16
Power consumption, thermostat OFF state (PTO)	W	16
Standby power consumption (PSB)	W	16
Power consumption, operating state, with crankcase heating (PCK)	W	38
Booster heater heating output (PSUB)	kW	0,69
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	54
Flow rate, heat source side	m ³ /h	4000



ENERG
енергия · ενέργεια



STIEBEL ELTRON SBBE 301 WP



50 W

319 L

2017

812/2013

Product datasheet: DHW cylinder to regulation (EU) no. 812/2013

		SBBE 301 WP
		234348
Manufacturer		STIEBEL ELTRON
Model identification of the supplier		SBBE 301 WP
Energy efficiency class		A
Standby losses	W	50
Cylinder capacity	l	319



ENERG
енергия · ενέργεια


Y IJA
IE IA

STIEBEL ELTRON WPL 20 A



55 °C

35 °C

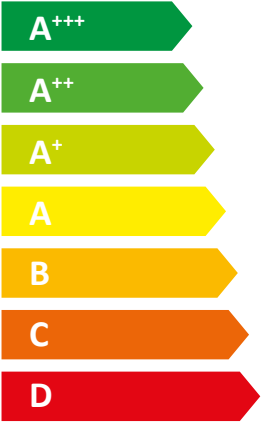

A++

A+++

54 dB

■ 17	■ 15
■ 12	■ 11
■ 8	■ 7
kW	kW

2019

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPL 20 A
		236640
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Energy efficiency class for central heating in moderate climates for low temperature applications		A+++
Rated heating output in moderate climates for medium temperature applications	kW	12
Rated heating output in moderate climates for low temperature applications	kW	11
Energy efficiency for central heating in moderate climates for medium temperature applications	%	143
Energy efficiency for central heating in moderate climates for low temperature applications	%	185
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	6801
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	4839
Rated heating output in colder climates for medium temperature applications	kW	17
Rated heating output in colder climates for low temperature applications	kW	15
Rated heating output in warmer climates for medium temperature applications	kW	8
Rated heating output in warmer climates for low temperature applications	kW	7
Energy efficiency for central heating in colder climates for medium temperature applications	%	132
Energy efficiency for central heating in colder climates for low temperature applications	%	165
Energy efficiency for central heating in warmer climates for medium temperature applications	%	163
Energy efficiency for central heating in warmer climates for low temperature applications	%	214
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	12405
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	8804
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	2581
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	1720
Sound power level external	dB(A)	54



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

STIEBEL ELTRON

WPL 20 A



A⁺⁺

A⁺⁺⁺

A⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G

+		<input type="checkbox"/>
+		<input type="checkbox"/>
+		<input checked="" type="checkbox"/>
+		<input type="checkbox"/>

		WPL 20 A
		236640
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	143
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	147
Room heating energy efficiency of composite system under colder climatic conditions	%	136
Room heating energy efficiency of composite system under warmer climatic conditions	%	167
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	5
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	6
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++

		WPL 20 A
		236640
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		-
Rated heating output in moderate climates for medium temperature applications	kW	12
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	10,60
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	8,40
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	7,80
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	9,00
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	9,90
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	9,48
For air/water heat pumps:Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	9,48
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,69
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		3,51
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,61
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		6,66
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,81
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,29
For air/water heat pumps:Tj = -15 °C (if TOL < -20 °C) (COPd)		2,29
Dual mode temperature (Tbiv)	°C	-5
Heating water operating temperature limit (WTOL)	°C	65
Power consumption, OFF state (Poff)	W	16,000
Power consumption, thermostat OFF state (PTO)	W	16
Standby power consumption (PSB)	W	16,000
Power consumption, operating state, with crankcase heating (PCK)	W	38,000
Booster heater heating output (PSUB)	kW	0,690
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	54
Flow rate, heat source side	m ³ /h	4000