







ENERG

енергия · ενέργεια



STIEBEL ELTRON

WPL 13 ACS classic UK compact Set S

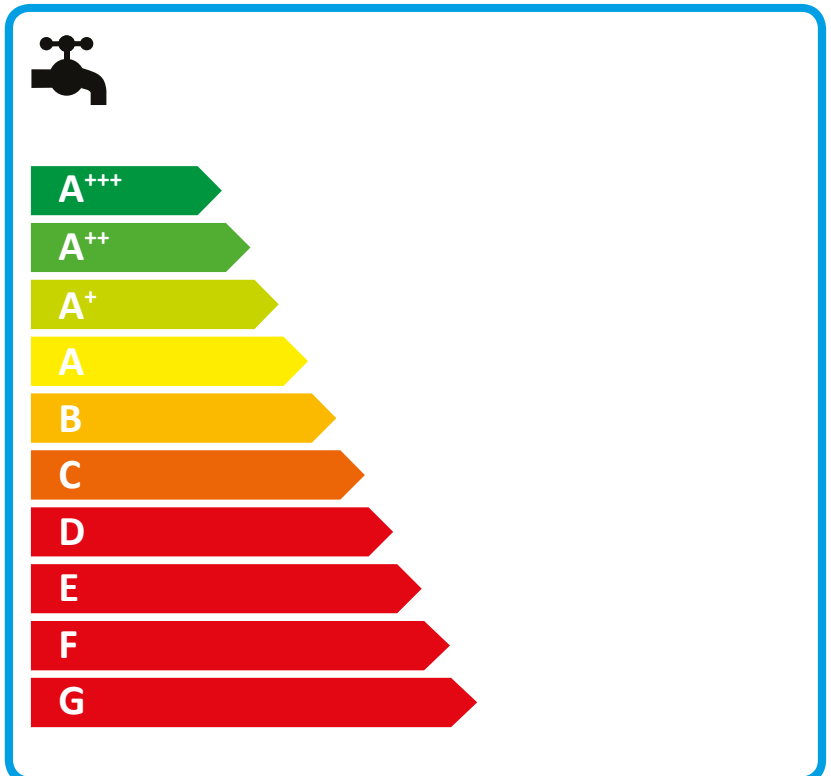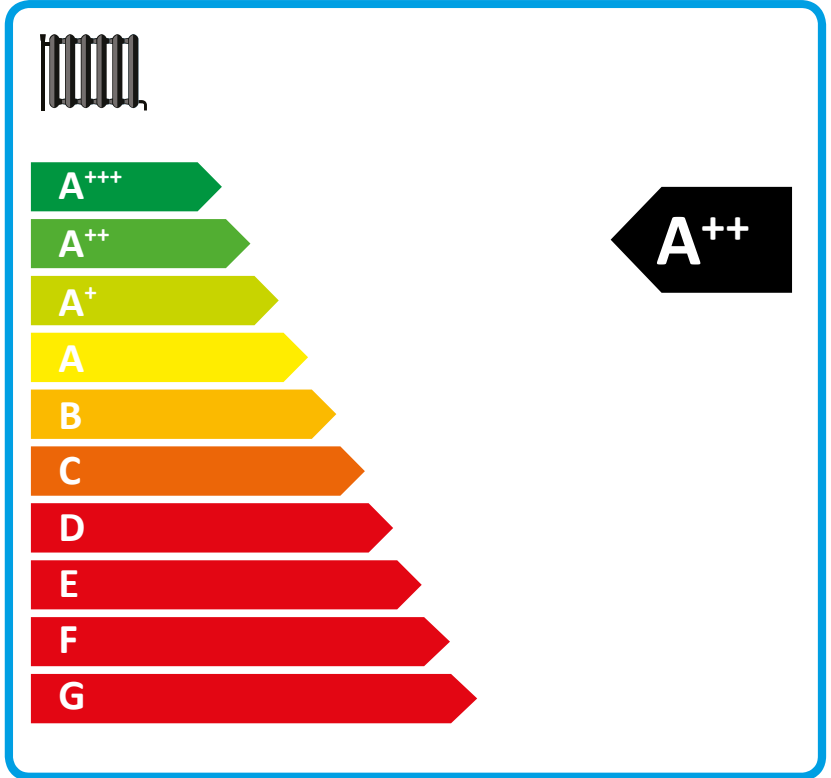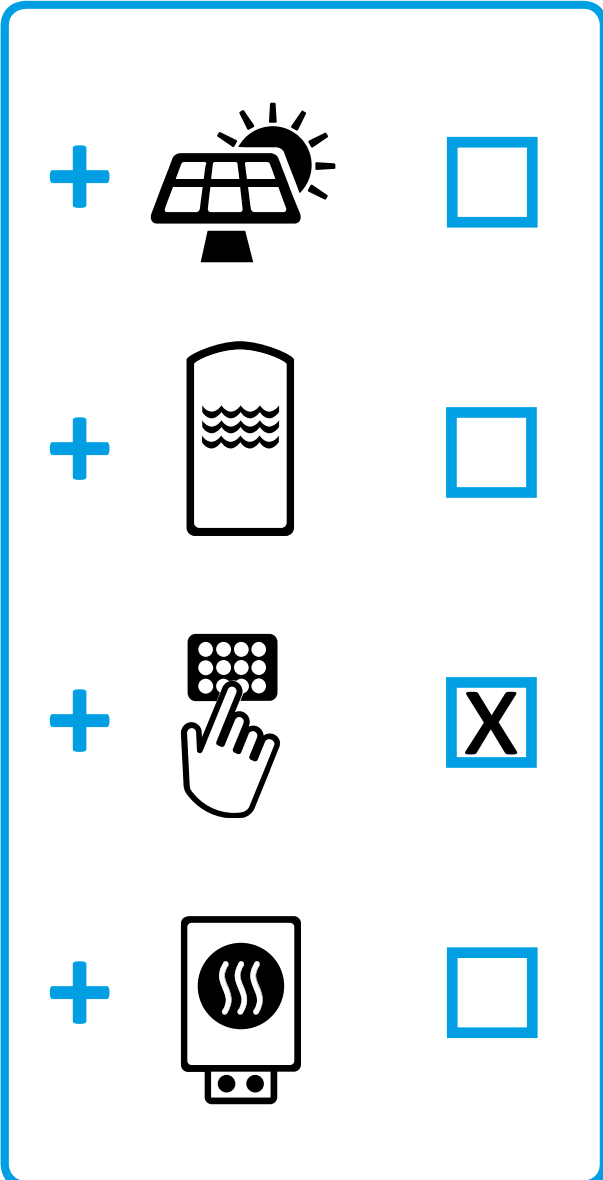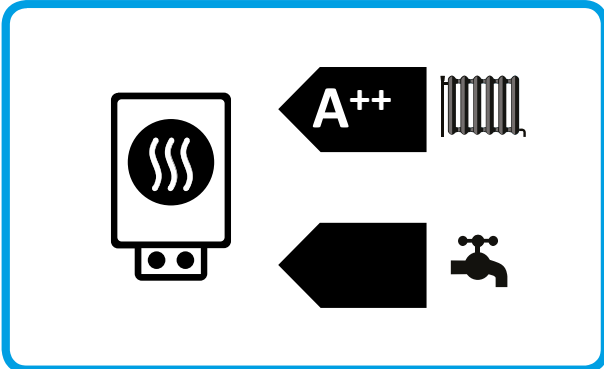

Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013 / (S.I. 2019 No. 539 / Schedule 2)

		WPL 13 ACS classic UK compact Set S
		239115
Manufacturer		STIEBEL ELTRON
Seasonal room heating efficiency in moderate climates for average temperature applications (η_s)	%	125
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	129
Room heating energy efficiency of composite system under colder climatic conditions	%	107
Room heating energy efficiency of composite system under warmer climatic conditions	%	156
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	22
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	27
Energy efficiency class for central heating in moderate climates for medium temperature applications		A++
Room heating energy efficiency class of composite system under moderate climatic conditions		A++

Required details about room heater and combi heater with heat pump to regulation (EU) no. 813/2013 & 811/2013

		WPL 13 ACS classic UK compact Set S	
		239115	
Manufacturer		STIEBEL ELTRON	
Heat source		Outside air	
Low temperature heat pump			-
Combi boiler with heat pump			x
Rated heating output in colder climates for average temperature applications (Prated)	kW		11
Rated heating output in moderate climates for average temperature applications (Prated)	kW		8
Rated heating output in warmer climates for average temperature applications (Prated)	kW		6
Tj = -7 °C heating output, partial load range in colder climates (Pdh)	kW		6.6
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW		5.10
Tj = 2 °C heating output, partial load range in colder climates (Pdh)	kW		4
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW		4.10
Tj = 2 °C heating output, partial load range in warmer climates (Pdh)	kW		6
Tj = 7 °C heating output, partial load range in colder climates (Pdh)	kW		2.7
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW		2.60
Tj = 7 °C heating output, partial load range in warmer climates (Pdh)	kW		3.9
Tj = 12 °C heating output, partial load range in colder climates (Pdh)	kW		3.4
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW		3.30
Tj = 12 °C heating output, partial load range in warmer climates (Pdh)	kW		3.3
Tj = dual mode temperature in colder climates (Pdh)	kW		6.6
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW		6.10
Tj = dual mode temperature in warmer climates (Pdh)	kW		6
Tj = operating temperature limit in colder climates (Pdh)	kW		1.8
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW		5.10
Tj = operating temperature limit in warmer climates (Pdh)	kW		6
For air/water heat pumps: Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW		0.00
Dual mode temperature in colder climates (Tbiv)	°C		-7
Dual mode temperature in moderate climates (Tbiv)	°C		-5
Dual mode temperature in warmer climates (Tbiv)	°C		2
Seasonal room heating efficiency in colder climates for average temperature applications (ηs)	%		103
Seasonal room heating efficiency in moderate climates for average temperature applications (ηs)	%		125
Seasonal room heating efficiency in warmer climates for average temperature applications (ηs)	%		153
Tj = -7 °C COP, partial load range in colder climates (COPd)			2.4
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)			2.00
Tj = 2 °C COP, partial load range in colder climates (COPd)			3.6
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)			3.30
Tj = 2 °C COP, partial load range in warmer climates (COPd)			2.2
Tj = 7 °C COP, partial load range in colder climates (COPd)			5
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)			4.60
Tj = 7 °C COP, partial load range in warmer climates (COPd)			3.2
Tj = 12 °C COP, partial load range in colder climates (COPd)			6.2
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)			6
Tj = 12 °C COP, partial load range in warmer climates (COPd)			5.7
Tj = dual mode temperature in colder climates (COPd)			2.4
Tj = dual mode temperature under moderate climatic conditions (COPd)			2.30
Tj = dual mode temperature in warmer climates (COPd)			2.2

Tj = operating temperature limit in colder climates (COPd)		1.4
Tj = operating temperature limit under moderate climatic conditions (COPd)		2.00
Tj = operating temperature limit in warmer climates (COPd)		2.2
For air/water heat pumps: Tj= -15 °C (if TOL < -20 °C) (COPd)		0.00
Operating temperature limit in colder climates (TOL)	°C	-15
Operating temperature limit in moderate climates (TOL)	°C	-7.000
Operating temperature limit in warmer climates (TOL)	°C	2
Heating water operating temperature limit in colder climates (WTOL)	°C	60
Heating water operating temperature limit (WTOL)	°C	60
Heating water operating temperature limit in warmer climates (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	17.000
Power consumption, thermostat OFF state (PTO)	W	30
Standby power consumption (PSB)	W	17.000
Power consumption, operating state, with crankcase heating (PCK)	W	5.000
Booster heater heating output in colder climates (Psup)	kW	11
Booster heater heating output (PSUB)	kW	8.000
Booster heater heating output in warmer climates (Psup)	kW	0
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	57
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	10193
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	4865
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	2048
Flow rate, heat source side	m ³ /h	2200
Annual power consumption in colder climates (AEC)	kWh/a	1689
Annual power consumption in moderate climates (AEC)	kWh/a	1526
Annual power consumption in warmer climates (AEC)	kWh/a	1181
Energy efficiency for DHW heating (Γ_{wh}) under moderate climatic conditions	%	111
Special measures	For all special measures to be taken during assembly, installation or maintenance of the room heater, see the installation instructions	