



## Product datasheet: Mechanical ventilation unit to Regulation (EU) No. 1254/2014 | 1253/2014

		LWZ-W 600 Premium
		204712
Manufacturer		STIEBEL ELTRON
Specific energy consumption under colder climate conditions with control subject to on-site requirements	kWh/(m²a)	-81,98
Specific energy consumption under average climate conditions with control subject to on-site requirements	kWh/(m²a)	-42,94
Specific energy consumption under warmer climate conditions with control subject to on-site requirements	kWh/(m²a)	-17,95
Energy efficiency class under colder climate conditions with control subject to on-site requirements		A+
Energy efficiency class under average climate conditions with control subject to on-site requirements		A+
Energy efficiency class under warmer climate conditions with control subject to on-site requirements		E
Ventilation unit type		WLA, Zwei Richtungen
Drive type		Drehzahlgeregelt
Heat recovery type		Rekuperativ
Rate of temperature change for heat recovery	%	87,5
Max. air flow rate	m³/h	600
Max. power consumption	W	252
Sound power level LWA	dB(A)	54
Reference air flow rate	m³/s	0,117
Reference pressure differential	Pa	50
Specific power input	W/(m³/h)	0,23
Control factor, control subject to on-site requirements		0,65
Internal air leakage quota	%	0,78
External air leakage quota	%	0,59
Filter change indicator		Visual filter change warning signal on the remote control display. Please note: Regular filter changes are important for the energy efficiency of the system
Annual power consumption under colder climate conditions with control subject to on-site requirements	kWh/a	704
Annual power consumption under average climate conditions with control subject to on-site requirements	kWh/a	167
Annual power consumption under warmer climate conditions with control subject to on-site requirements	kWh/a	122
Annual heating savings under colder climate conditions with control subject to on-site requirements	kWh/a	9084
Annual heating savings under average climate conditions with control subject to on-site requirements	kWh/a	4644
Annual heating savings under warmer climate conditions with control subject to on-site requirements	kWh/a	2100

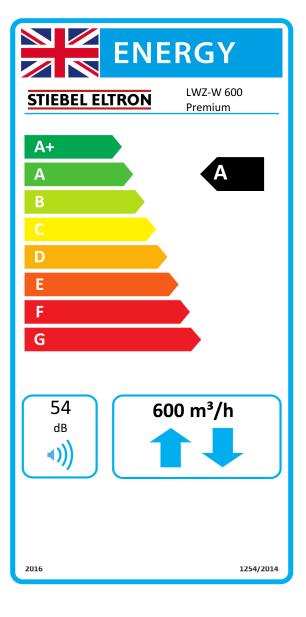


## Product datasheet: Mechanical ventilation unit to Regulation (EU) No. 1254/2014 | 1253/2014

		<b>LWZ-W 600 Premium</b> 204712
Manufacturer		STIEBEL ELTRON
Specific energy consumption under colder climate conditions with central demand-dependent control	kWh/(m²a)	-78,27
Specific energy consumption under average climate conditions with central demand-dependent control	kWh/(m²a)	-39,99
Specific energy consumption under warmer climate conditions with central demand-dependent control	kWh/(m²a)	-15,44
Energy efficiency class under colder climate conditions with central demand-dependent control		A+
Energy efficiency class under average climate conditions with central demand-dependent control		А
Energy efficiency class under warmer climate conditions with central demand-dependent control		E
Ventilation unit type		WLA, Zwei Richtungen
Drive type		Drehzahlgeregelt
Heat recovery type		Rekuperativ
Rate of temperature change for heat recovery	%	87,5
Max. air flow rate	m³/h	600
Max. power consumption	W	252
Sound power level LWA	dB(A)	54
Reference air flow rate	m³/s	0,117
Reference pressure differential	Pa	50
Specific power input	W/(m³/h)	0,23
Control factor, central demand-dependent control		0,85
Internal air leakage quota	%	0,78
External air leakage quota	%	0,59
Filter change indicator		Visual filter change warning signal on the remote control display. Please note: Regular filter changes are important for the energy efficiency of the system
Annual power consumption under colder climate conditions with central demand-dependent control	kWh/a	790
Annual power consumption under average climate conditions with central demand-dependent control	kWh/a	253
Annual power consumption under warmer climate conditions with central demand-dependent control	kWh/a	208
Annual heating savings under colder climate conditions with central demand-dependent control	kWh/a	8930
Annual heating savings under average climate conditions with central demand-dependent control	kWh/a	4565
Annual heating savings under warmer climate conditions with central demand-dependent control	kWh/a	2064

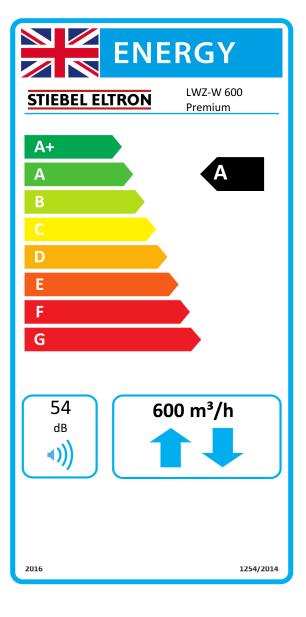

## $Product\ datasheet:\ Mechanical\ ventilation\ unit\ to\ Regulation\ (EU)\ No.\ 1254/2014\ |\ 1253/2014$

	LWZ-W 600 Premium
	204712
	STIEBEL ELTRON
kWh/(m²a)	-76,20
kWh/(m²a)	-38,30
kWh/(m²a)	-13,96
	A+
	A
	E
	WLA, Zwei Richtungen
	Drehzahlgeregelt
	Rekuperativ
%	87,5
m³/h	600
W	252
dB(A)	54
m³/s	0,117
Pa	50
W/(m³/h)	0,23
	0,95
%	0,78
%	0,59
	Visual filter change warning signal on the remote control display. Please note: Regular filter changes are important for the energy efficiency of the system
kWh/a	842
kWh/a	305
kWh/a	260
kWh/a	8852
kWh/a	4525
kWh/a	2046
	kWh/(m²a) kWh/(m²a)  // kWh/(m²a)  // w // dB(A) // m³/h // w // dB(A) // m³/h // w // kWh/a // kWh/a // kWh/a // kWh/a

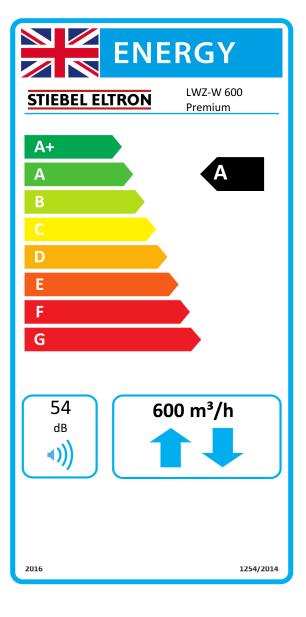

## Product datasheet: Mechanical ventilation unit to Regulation (EU) No. 1254/2014 | 1253/2014

		LWZ-W 600 Premium
		204712
Manufacturer		STIEBEL ELTRON
Specific energy consumption under colder climate conditions with manual control	kWh/(m²a)	-75,12
Specific energy consumption under average climate conditions with manual control	kWh/(m²a)	-37,27
Specific energy consumption under warmer climate conditions with manual control	kWh/(m²a)	-13,17
Energy efficiency class under colder climate conditions with manual control		A+
Energy efficiency class under average climate conditions with manual control		A
Energy efficiency class under warmer climate conditions with manual control		Е
Ventilation unit type		WLA, Zwei Richtungen
Drive type		Drehzahlgeregelt
Heat recovery type		Rekuperativ
Rate of temperature change for heat recovery	%	87,5
Max. air flow rate	m³/h	600
Max. power consumption	W	252
Sound power level LWA	dB(A)	54
Reference air flow rate	m³/s	0,117
Reference pressure differential	Pa	50
Specific power input	W/(m³/h)	0,23
Control factor, manual control		1,00
Internal air leakage quota	%	0,78
External air leakage quota	%	0,59
Filter change indicator		Visual filter change warning signal on the remote control display. Please note: Regular filter changes are important for the energy efficiency of the system
Annual power consumption under colder climate conditions with manual control	kWh/a	870
Annual power consumption under average climate conditions with manual control	kWh/a	333
Annual power consumption under warmer climate conditions with manual control	kWh/a	288
Annual heating savings under colder climate conditions with manual control	kWh/a	8814
Annual heating savings under average climate conditions with manual control	kWh/a	4505
Annual heating savings under warmer climate conditions with manual control	kWh/a	2037