






ENERGY

STIEBEL ELTRON

LWZ 8 S Trend

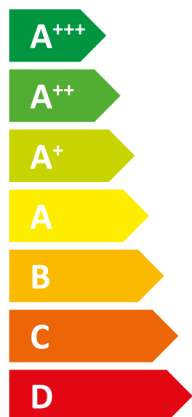

A⁺

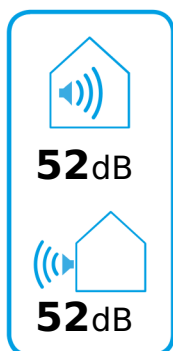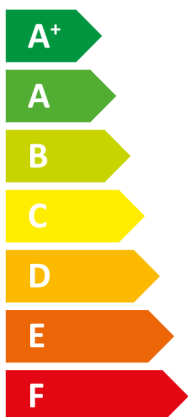

- 11 kW
- **7 kW**
- 8 kW

2019

811/2013

Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		LWZ 8 S Trend
		201684
Manufacturer		STIEBEL ELTRON
Load profile		-
Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)		A+
Energy efficiency class, space heating under average climate conditions, low-temperature applications (A+++ -> D)		A++
Energy efficiency class, DHW heating under average climate conditions (A+++ -> D)		-
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	7
Rated heating output under average climate conditions for low-temperature applications (P rated)	kW	10
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	4427
Annual energy consumption under average climate conditions for low-temperature applications (QHE)	kWh/a	4982
Annual power consumption under average climate conditions (AEC)	kWh	1676
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s)	%	121
Seasonal space heating energy efficiency under average climate conditions for low-temperature applications (η_s)	%	155
Energy efficiency, DHW heating (η_{wh}), under average climate conditions		-
Sound power level, indoor	dB(A)	52
Option for operation only at off-peak times		-
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	11
Rated heating output under colder climate conditions for low-temperature applications (P rated)	kW	14
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	8
Rated heating output under warmer climate conditions for low-temperature applications (P rated)	kW	9
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	10109
Annual energy consumption under colder climate conditions for low-temperature applications (QHE)	kWh/a	10634
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	3264
Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)	kWh/a	2517
Annual power consumption under colder climate conditions (AEC)	kWh	2042
Annual power consumption under warmer climate conditions (AEC)	kWh	1183
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (η_s)	%	100
Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications (η_s)	%	129
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (η_s)	%	133
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	184
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	184
Energy efficiency, DHW heating (η_{wh}), warmer climates		-
Sound power level, outdoor	dB(A)	52



ENERGY

LWZ 8 S Trend

STIEBEL ELTRON



A⁺



-



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D


E

F

G

A⁺

+



+



+



+



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G

-

Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		LWZ 8 S Trend
		201684
Manufacturer		STIEBEL ELTRON
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s)	%	121
Temperature control class		VI
Contribution of temperature control to space heating energy efficiency	%	4
Space heating energy efficiency of package under average climate conditions	%	159
Space heating energy efficiency of package under colder climate conditions	%	133
Space heating energy efficiency of package under warmer climate conditions	%	188
Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions	%	26
Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions	%	29
Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)		A+
Space heating energy efficiency class of package under average climate conditions (A+++ -> D)		A+
Energy efficiency class, DHW heating under average climate conditions (A+++ -> D)		-
Load profile		-

Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

		LWZ 8 S Trend
		201684
Manufacturer		STIEBEL ELTRON
Heat source		Luft
Low temperature heat pump		-
With auxiliary heater		-
Combination heater with heat pump		-
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	11
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	7
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	8
Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	6.4
Tj = -7 °C heating output, partial load range under average climate conditions (Pdh)	kW	5.9
Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh)	kW	3.9
Tj = 2 °C heating output, partial load range under average climate conditions (Pdh)	kW	3.5
Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	8.3
Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	2.8
Tj = 7 °C heating output, partial load range under average climate conditions (Pdh)	kW	2.7
Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	5.4
Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh)	kW	3.2
Tj = 12 °C heating output, partial load range under average climate conditions (Pdh)	kW	3.2
Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	3.2
Tj = dual mode temperature under colder climate conditions (Pdh)	kW	6.4
Tj = dual mode temperature under average climate conditions (Pdh)	kW	5.9
Tj = dual mode temperature under warmer climate conditions (Pdh)	kW	8.3
Tj = operating temperature limit under colder climate conditions (Pdh)	kW	2.6
Tj = operating temperature limit under average climate conditions (Pdh)	kW	2.7
Tj = operating temperature limit under warmer climate conditions (Pdh)	kW	8.3
For air source heat pumps: Tj = -15 °C (if TOL< -20 °C) (Pdh)		-
Dual mode temperature under colder climate conditions (Tbiv)	Grad C	-7
Dual mode temperature under average climate conditions (Tbiv)	Grad C	-7
Dual mode temperature under warmer climate conditions (Tbiv)	Grad C	2
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs)	%	100
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs)	%	121
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs)	%	133
Tj = -7 °C COP, partial load range under colder climate conditions (COPd)		2.5
Tj = -7 °C COP, partial load range under average climate conditions (COPd)		2.3
Tj = 2 °C COP, partial load range under colder climate conditions (COPd)		3.5
Tj = 2 °C COP, partial load range under average climate conditions (COPd)		3.3
Tj = 2 °C COP, partial load range under warmer climate conditions (COPd)		2.3
Tj = 7 °C COP, partial load range under colder climate conditions (COPd)		4.7
Tj = 7 °C COP, partial load range under average climate conditions (COPd)		4.1

Tj = 7 °C COP, partial load range under warmer climate conditions (COPd)		3.3
Tj = 12 °C COP, partial load range under colder climate conditions (COPd)		5.7
Tj = 12 °C COP, partial load range under average climate conditions (COPd)		529
Tj = 12 °C COP, partial load range under warmer climate conditions (COPd)		5.1
Tj = dual mode temperature under colder climate conditions (COPd)		2.5
Tj = dual mode temperature under average climate conditions (COPd)		2.3
Tj = dual mode temperature under warmer climate conditions (COPd)		2.3
Tj = operating temperature limit under colder climate conditions (COPd)		2.1
Tj = operating temperature limit under average climate conditions (COPd)		1.9
Tj = operating temperature limit under warmer climate conditions (COPd)		2.3
For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)		-
Operating temperature limit under colder climate conditions (TOL)	Grad C	-20
Operating temperature limit under average climate conditions (TOL)	Grad C	-10
Operating temperature limit under warmer climate conditions (TOL)	Grad C	2
Operating temperature limit of heating water under colder climate conditions (WTOL)	Grad C	60
Operating temperature limit of heating water under average climate conditions (WTOL)	Grad C	60
Operating temperature limit of heating water under warmer climate conditions (WTOL)	Grad C	60
Power consumption, off-mode (Poff)	Watt	27
Power consumption, thermostat off-mode (PTO)	Watt	63
Power consumption, standby state (PSB)	Watt	27
Power consumption, operating state, with crankcase heating (PCK)	Watt	35
Rated heating output of auxiliary heater under colder climate conditions (PSUP)		-
Rated heating output of auxiliary heater under average climate conditions (PSUP)	kW	4
Rated heating output of auxiliary heater under warmer climate conditions (PSUP)		-
Type of energy supply, auxiliary heater		elektrisch
Output control		veränderlich
Sound power level, outdoor	dB(A)	52
Sound power level, indoor	dB(A)	52
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	10109
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	4427
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	3264
Flow rate on heat source side		-
Load profile		-
Daily power consumption under colder climate conditions (QELEC)		-
Daily power consumption under average climate conditions (QELEC)		-
Daily power consumption under warmer climate conditions (QELEC)		-
Annual power consumption under colder climate conditions (AEC)	kWh	2042
Annual power consumption under average climate conditions (AEC)	kWh	1676
Annual power consumption under warmer climate conditions (AEC)	kWh	1183
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	184
Energy efficiency, DHW heating (η_{wh}), under average climate conditions		-
Energy efficiency, DHW heating (η_{wh}), warmer climates		-