

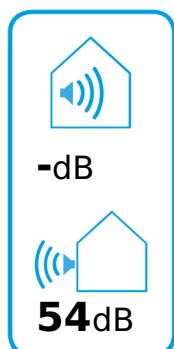


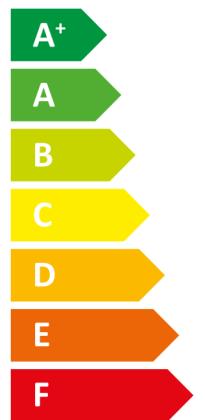

ENERGY

STIEBEL ELTRON

WPL 25 AC compact
duo Set 2.2

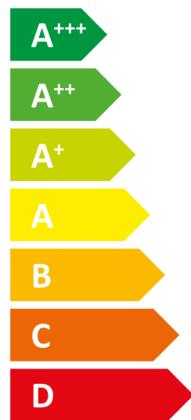

2019

811/2013

WPL 25 AC compact duo Set 2.2

207689






Manufacturer	STIEBEL ELTRON	
Load profile	-	
Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)	A++	
Energy efficiency class, space heating under average climate conditions, low-temperature applications (A+++ -> D)	A+++	
Energy efficiency class, DHW heating under average climate conditions (A+++ -> D)	-	
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	15
Rated heating output under average climate conditions for low-temperature applications (P rated)	kW	15
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	8444
Annual energy consumption under average climate conditions for low-temperature applications (QHE)	kWh/a	6513
Annual power consumption under average climate conditions (AEC)	-	
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s)	%	144
Seasonal space heating energy efficiency under average climate conditions for low-temperature applications (η_s)	%	187
Energy efficiency, DHW heating (η_{wh}), under average climate conditions	-	
Sound power level, indoor	-	
Option for operation only at off-peak times	-	
Special measures	Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation- und Montageanweisung	
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	22
Rated heating output under colder climate conditions for low-temperature applications (P rated)	kW	21
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	8
Rated heating output under warmer climate conditions for low-temperature applications (P rated)	kW	8
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	16179
Annual energy consumption under colder climate conditions for low-temperature applications (QHE)	kWh/a	12690
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	2369
Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)	kWh/a	1718
Annual power consumption under colder climate conditions (AEC)	-	
Annual power consumption under warmer climate conditions (AEC)	-	
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (η_s)	%	125
Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications (η_s)	%	160
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (η_s)	%	177
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	246
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	246
Energy efficiency, DHW heating (η_{wh}), warmer climates	-	
Sound power level, outdoor	dB(A)	54



ENERGY

WPL 25 AC compact duo Set 2.2

STIEBEL ELTRON

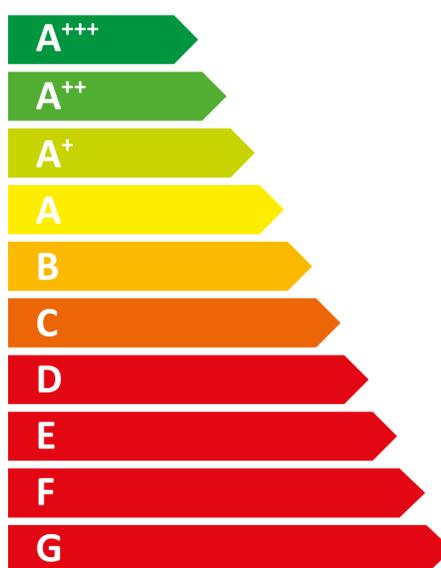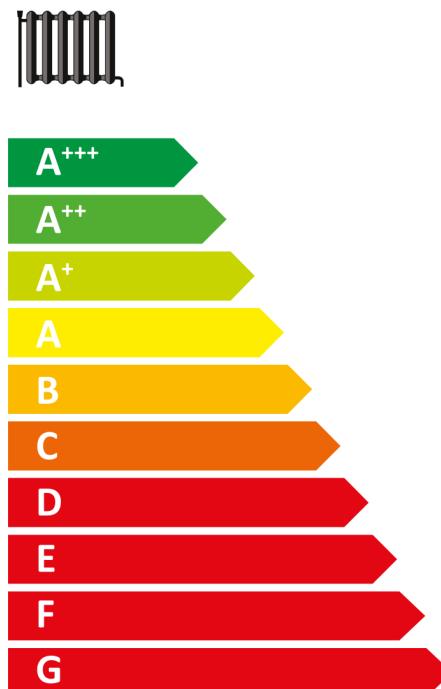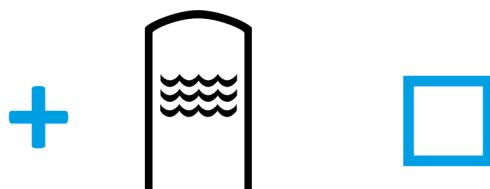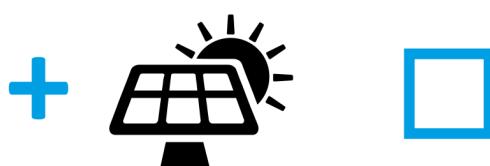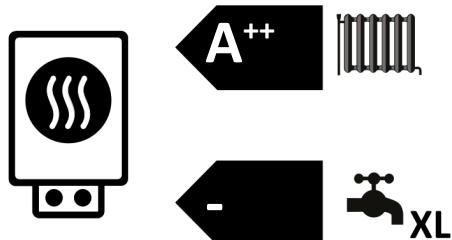

		WPL 25 AC compact duo Set 2.2
Manufacturer		STIEBEL ELTRON
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η_s)	%	144
Temperature control class		VI
Contribution of temperature control to space heating energy efficiency	%	4
Space heating energy efficiency of package under average climate conditions	%	148
Space heating energy efficiency of package under colder climate conditions	%	135
Space heating energy efficiency of package under warmer climate conditions	%	181
Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions	%	11
Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions	%	35
Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)		A++
Space heating energy efficiency class of package under average climate conditions (A+++ -> D)		A++
Energy efficiency class, DHW heating under average climate conditions (A+++ -> D)		-
Load profile		-

		WPL 25 AC compact duo Set 2.2
		207689
Manufacturer		STIEBEL ELTRON
Heat source		Luft
Low temperature heat pump		-
With auxiliary heater		-
Combination heater with heat pump		-
Rated heating output under colder climate conditions for medium-temperature applications (P rated)	kW	22
Rated heating output under average climate conditions for medium-temperature applications (P rated)	kW	15
Rated heating output under warmer climate conditions for medium-temperature applications (P rated)	kW	8
T _j = -7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	13.3
T _j = -7 °C heating output, partial load range under average climate conditions (Pdh)	kW	13.8
T _j = 2 °C heating output, partial load range under colder climate conditions (Pdh)	kW	8.3
T _j = 2 °C heating output, partial load range under average climate conditions (Pdh)	kW	8.4
T _j = 2 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	8.4
T _j = 7 °C heating output, partial load range under colder climate conditions (Pdh)	kW	7.9
T _j = 7 °C heating output, partial load range under average climate conditions (Pdh)	kW	7.8
T _j = 7 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	7.5
T _j = 12 °C heating output, partial load range under colder climate conditions (Pdh)	kW	6.7
T _j = 12 °C heating output, partial load range under average climate conditions (Pdh)	kW	9
T _j = 12 °C heating output, partial load range under warmer climate conditions (Pdh)	kW	6.4
T _j = dual mode temperature under colder climate conditions (Pdh)	kW	12.8
T _j = dual mode temperature under average climate conditions (Pdh)	kW	12.5
T _j = dual mode temperature under warmer climate conditions (Pdh)	kW	8.4
T _j = operating temperature limit under colder climate conditions (Pdh)	kW	21.7
T _j = operating temperature limit under average climate conditions (Pdh)	kW	13.4
T _j = operating temperature limit under warmer climate conditions (Pdh)	kW	8.4
For air source heat pumps: T _j = -15 °C (if TOL < -20 °C) (Pdh)	kW	13.4
Dual mode temperature under colder climate conditions (Tbiv)	Grad C	-7
Dual mode temperature under average climate conditions (Tbiv)	Grad C	-5
Dual mode temperature under warmer climate conditions (Tbiv)	Grad C	2
Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (η _s)	%	125
Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (η _s)	%	144
Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (η _s)	%	177
T _j = -7 °C COP, partial load range under colder climate conditions (COPd)		2.7
T _j = -7 °C COP, partial load range under average climate conditions (COPd)		2.5
T _j = 2 °C COP, partial load range under colder climate conditions (COPd)		3.9
T _j = 2 °C COP, partial load range under average climate conditions (COPd)		3.5
T _j = 2 °C COP, partial load range under warmer climate conditions (COPd)		2.7
T _j = 7 °C COP, partial load range under colder climate conditions (COPd)		5.1
T _j = 7 °C COP, partial load range under average climate conditions (COPd)		4.6

T _j = 7 °C COP, partial load range under warmer climate conditions (COPd)	3.6	
T _j = 12 °C COP, partial load range under colder climate conditions (COPd)	7.1	
T _j = 12 °C COP, partial load range under average climate conditions (COPd)	6.7	
T _j = 12 °C COP, partial load range under warmer climate conditions (COPd)	6.2	
T _j = dual mode temperature under colder climate conditions (COPd)	2.9	
T _j = dual mode temperature under average climate conditions (COPd)	2.6	
T _j = dual mode temperature under warmer climate conditions (COPd)	2.7	
T _j = operating temperature limit under colder climate conditions (COPd)	2.3	
T _j = operating temperature limit under average climate conditions (COPd)	2.3	
T _j = operating temperature limit under warmer climate conditions (COPd)	2.7	
For air source heat pumps: T _j = -15 °C (if TOL < -20 °C) (COPd)	2.3	
Operating temperature limit under colder climate conditions (TOL)	Grad C	-20
Operating temperature limit under average climate conditions (TOL)	Grad C	-10
Operating temperature limit under warmer climate conditions (TOL)	Grad C	2
Operating temperature limit of heating water under colder climate conditions (WTOL)	Grad C	65
Operating temperature limit of heating water under average climate conditions (WTOL)	Grad C	65
Operating temperature limit of heating water under warmer climate conditions (WTOL)	Grad C	65
Power consumption, off-mode (Poff)	Watt	10
Power consumption, thermostat off-mode (PTO)	Watt	10
Power consumption, standby state (PSB)	Watt	10
Power consumption, operating state, with crankcase heating (PCK)	Watt	38
Rated heating output of auxiliary heater under colder climate conditions (PSUP)	kW	10.9
Rated heating output of auxiliary heater under average climate conditions (PSUP)	kW	1.6
Rated heating output of auxiliary heater under warmer climate conditions (PSUP)	kW	0
Type of energy supply, auxiliary heater		elektrisch
Output control		veränderlich
Sound power level, outdoor	dB(A)	54
Sound power level, indoor		-
Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)	kWh/a	16179
Annual energy consumption under average climate conditions for medium-temperature applications (QHE)	kWh/a	8444
Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)	kWh/a	2369
Flow rate on heat source side	m ³ /h	4000
Load profile		-
Daily power consumption under colder climate conditions (QELEC)		-
Daily power consumption under average climate conditions (QELEC)		-
Daily power consumption under warmer climate conditions (QELEC)		-
Annual power consumption under colder climate conditions (AEC)		-
Annual power consumption under average climate conditions (AEC)		-
Annual power consumption under warmer climate conditions (AEC)		-
Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications (η_s)	%	246
Energy efficiency, DHW heating (η_{wh}), under average climate conditions		-
Energy efficiency, DHW heating (η_{wh}), warmer climates		-
Special measures	Alle beim Zusammenbau, der Installation oder Wartung des Raumheizgerätes zu treffenden besonderen Vorkehrungen: Siehe Installation- und Montageanweisung	